


100 Rec'd PCT/PTO 22 MAY 2001

FORM PTO-1390 (Modified) (REV 11-98)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER <b>208727US6PCT</b>	
<b>TRANSMITTAL LETTER TO THE UNITED STATES</b> <b>DESIGNATED/ELECTED OFFICE (DO/EO/US)</b> <b>CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR <div style="font-size: 1.2em; font-weight: bold;">09/831884</div>	
INTERNATIONAL APPLICATION NO. <b>PCT/JP00/06679</b>		INTERNATIONAL FILING DATE <b>28 SEPTEMBER 2000</b>		PRIORITY DATE CLAIMED <b>29 SEPTEMBER 1999</b>	
TITLE OF INVENTION <b>DISC RECORDING AND/OR REPRODUCING APPARATUS</b>					
APPLICANT(S) FOR DO/EO/US <b>WATANABE Tomohiro et al.</b>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</li> <li>4. <input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li>7. <input checked="" type="checkbox"/> A copy of the International Search Report (PCT/ISA/210).</li> <li>8. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input checked="" type="checkbox"/> have been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>9. <input checked="" type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>10. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).</li> <li>11. <input type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409).</li> <li>12. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).</li> </ol> <p><b>Items 13 to 20 below concern document(s) or information included:</b></p> <ol style="list-style-type: none"> <li>13. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>14. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>15. <input type="checkbox"/> A <b>FIRST</b> preliminary amendment.</li> <li>16. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li> <li>17. <input type="checkbox"/> A substitute specification.</li> <li>18. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>19. <input type="checkbox"/> Certificate of Mailing by Express Mail</li> <li>20. <input checked="" type="checkbox"/> Other items or information:</li> </ol>					
<div style="border: 1px solid black; padding: 5px;"> <b>Request for Consideration of Documents Cited in International Search Report</b>  <b>Notice of Priority</b>  <b>PCT/IB/304</b>  <b>PCT/IB/308</b>  <b>Drawings (35 sheets)</b>  <b>Amended Sheet (Page 46)</b> </div>					

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) <b>09/831884</b>		INTERNATIONAL APPLICATION NO. <b>PCT/JP00/06679</b>	ATTORNEY'S DOCKET NUMBER <b>208727US6PCT</b>
21. The following fees are submitted: <b>BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5)) :</b> <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1,000.00</b> <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860.00</b> <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710.00</b> <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690.00</b> <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b> <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>			<b>CALCULATIONS PTO USE ONLY</b>
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).			<b>\$860.00</b>
CLAIMS			
NUMBER FILED			
NUMBER EXTRA			
RATE			
Total claims	4 - 20 =	0	x \$18.00
Independent claims	1 - 3 =	0	x \$80.00
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>
<b>TOTAL OF ABOVE CALCULATIONS</b>			<b>= \$860.00</b>
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable).			<input type="checkbox"/>
<b>SUBTOTAL</b>			<b>= \$860.00</b>
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).			<b>\$0.00</b>
<b>TOTAL NATIONAL FEE</b>			<b>= \$860.00</b>
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).			<input type="checkbox"/>
<b>TOTAL FEES ENCLOSED</b>			<b>= \$860.00</b>
			<b>Amount to be: refunded \$</b>
			<b>charged \$</b>
<input checked="" type="checkbox"/> A check in the amount of <b>\$860.00</b> to cover the above fees is enclosed.			
<input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.			
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. <b>15-0030</b> A duplicate copy of this sheet is enclosed.			
<b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b>			
SEND ALL CORRESPONDENCE TO:			
 <b>22850</b>  <b>Surinder Sachar</b> <b>Registration No. 34,423</b>		SIGNATURE	
		<b>Gregory J. Maier</b>	
		NAME	
		<b>25,599</b>	
		REGISTRATION NUMBER	
		DATE	
		<b>May 22 2001</b>	

## SPECIFICATION

## DISC RECORDING AND/OR REPRODUCING APPARATUS

## TECHNICAL FIELD

The present invention relates to a disc recording  
5 and/or reproducing apparatus for storing in it and  
recording and/or reproducing a plurality of discs.

## BACKGROUND ART

As a disc recording and/or reproducing apparatus  
equipped on a vehicle for the purpose of playing a  
10 sound, there is a disc player. Such a disc player  
employs a method of storing a plurality of discs, for  
example, compact discs (hereinafter referred to as CDs)  
in a magazine and replacing a plurality of CDs in one  
magazine together at a time. Since it is made  
15 large-sized due to this arrangement, its main body  
portion is stored in a trunk, while only portions  
necessary for operation are installed in a passenger  
compartment. However, since CDs cannot be replaced  
when a vehicle is traveling, it is necessary to stop  
20 the vehicle and open the trunk for the replacement, and  
this is troublesome.

In response to this, an on-vehicle disc player to  
be put in a vehicle compartment has been developed in  
recent years. An on-vehicle disc player is demanded to  
25 store a plurality of CDs in it and is put in a  
specified space of the dashboard in a vehicle passenger  
compartment. Therefore, it has been an important  
problem to make an on-vehicle disc player small-sized.

Such an on-vehicle disc player forms a disc  
30 storing portion by stacking one over another, for  
example, six trays (disc carrying means) each carrying  
a CD on it in an enclosure (case) being nearly in the

shape of a rectangular parallelepiped having a fixed size called size 1 DIN or the like for example, and makes it possible to individually insert and eject the six CDs and makes it possible to select and reproduce one out of the six CDs.

However, since the on-vehicle disc player must store in it a plurality of CDs and contain components related to control of the respective mechanisms for performing many operations such as insertion, ejection, reproducing (recording) and the like of a CD, it has been difficult to make the whole apparatus small-sized.

Conventionally, an insertion position and a reproducing position for a CD have been offset with each other in the plane direction of the CD as shown in Figure 36. That is to say, when a CD is inserted in the conventional apparatus, the CD is caught by a pair of fins 300 fixed to a tray (omitting to show in Figure) for the CD. When the apparatus reproduces the CD, the CD has been moved from the caught position and a clearance 400 has been formed from the fins 300 to the CD in the plane direction.

Therefore, there has been a problem that the apparatus becomes large by a dimension D for the clearance 400.

## DISCLOSURE OF THE INVENTION

It is an object of the present invention to provide a disc recording and/or reproducing apparatus simplified in composition and made small in size.

A disc recording and/or reproducing apparatus of the present invention is characterized by a disc recording and/or reproducing apparatus comprising: a catching means for catching a disc, the catching means

being provided in a disc mounting means for mounting the disc; a releasing means for releasing a caught condition of the disc caught by the catching means after setting the disc to a turntable while keeping a direction of the disc surface; and a separating means for separating the disc from the disc mounting means in a condition that the disc is set on the turntable.

A disc recording and/or reproducing apparatus of the present invention is characterized by a disc recording and/or reproducing apparatus comprising: a catching means for catching a disc, the catching means being provided in a disc mounting means for mounting the disc; a releasing means for releasing a caught condition of the disc caught by the catching means after setting the disc to a turntable while keeping a direction of the disc surface; and a separating means for separating the disc from the disc mounting means in a condition that the disc is set on the turntable; wherein the catching means comprises a plate spring which pushes a face of a circumferential portion of the disc.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of the appearance of a disc player showing an embodiment of a disc recording and/or reproducing apparatus according to the present invention;

Figure 2 is an exploded perspective view of the disc player;

Figure 3 shows an embodiment of the present invention, and figure (a) thereof is an exploded perspective view of a disc storing portion of the disc player, and figure (b) thereof is a partially cutaway

perspective view of a main part of trays;

Figure 4 shows the disc storing portion of the disc player, and figure (a) thereof is a plan view of it and figure (b) thereof is a front view;

5        Figure 5 is a perspective view of the inside of the forward portion of the case seen from the back side;

Figure 6 is an exploded perspective view of a transfer means, a turning force supplying means and the  
10        like;

Figure 7 is a perspective view of a reproducing means;

Figure 8 is a sectional view of a main part of a holding means;

15        Figure 9 is a plan view of a pickup unit;

Figure 10 shows a positioning means, and figure (a) thereof is a back view in case that the holding means is positioned at the standby position and figure (b) thereof is a back view in case that the holding  
20        means is positioned at the reproducing position;

Figure 11 shows an operation means, and figure (a) thereof is a front view of a pickup elevator and a disc elevator, and figure (b) thereof is a front view of an inner slider, and figure (c) thereof is a front  
25        view of an outer slider;

Figure 12 is an operation explaining diagram of the operation means, showing a mode changeover position in the insertion/ejection mode for inserting or ejecting a CD;

30        Figure 13 shows a case of inserting or ejecting the second CD from the top, and figure (a) thereof is an operation explaining diagram of the operation means in the waiting state where the second CD is selected,

and figure (b) thereof is an operation explaining diagram of the operation means in a state where a shutter is open;

5 Figure 14 is an operation explaining diagram of the operation means in a state where pushing-out levers are turned in case of ejecting the second CD from the top;

10 Figure 15 shows the reproducing mode for reproducing a CD, and figure (a) thereof is an operation explaining diagram of the operation means in case of reproducing the sixth CD from the top, and figure (b) thereof is an operation explaining diagram of the operation means in case of reproducing the first CD from the top;

15 Figure 16 shows a case of reproducing the second CD from the top, and figure (a) thereof is an operation explaining diagram of the operation means when the pin is at position D in the waiting state and figure (b) thereof is an operation explaining diagram of the operation means when the pin is at position I in the reproducing state;

Figure 17 shows the disc player at the time of inserting a CD, and figure (a) thereof is a plan view of it and figure (b) thereof is a front view;

25 Figure 18 is a sectional side view of the disc player at the time of inserting a CD;

Figure 19 shows a pushing-out means at the time of ejecting a CD, and figure (a) thereof is a plan view of it and figure (b) thereof is a front view; Figure 20 is a sectional side view of the pushing-out means at the time of ejecting a CD;

Figure 21 shows operation of a separating cam, and figure (a) thereof is an operation explaining

diagram showing the relation to movement of trays, and figure (b) thereof is an operation explaining diagram showing the relation to a pin;

Figure 22 is a side view showing a state before  
5 the separating cam separates the trays;

Figure 23 is a side view showing a state where the trays are separated into two by the separating cam;

Figure 24 is a side view showing a state where the trays are separated into three by the separating  
10 cam;

Figure 25 is a side view showing a state where the trays are separated into three and thereafter only a selected tray descends and a selected CD mounts a turntable and is held by a catching means;

Figure 26 is a side view showing a state where  
15 the selected CD is held by the catching means and thereafter only the selected tray descends again and leaves the selected CD;

Figure 27 is an explanatory diagram showing a  
20 state where a plate spring of the selected tray rises and the selected CD is released at the time of reproducing;

Figure 28 shows a turning force supplying means, and figure (a) thereof is an operation explaining  
25 diagram showing a state where a turning force is not supplied, and figure (b) thereof is an operation explaining diagram showing a state where a turning force is supplied;

Figure 29 is an operation explaining diagram  
30 showing a state where a turning force is supplied to the catching means;

Figure 30 is an operation explaining diagram showing a state where the holding means occupies the



standby position;

Figure 31 is an operation explaining diagram showing a state where the holding means occupies the reproducing position;

5        Figure 32 shows a state of a regulation means when the holding means occupies the standby position, and figure (a) is an operation explaining diagram of it and figure (b) is a main part explaining diagram;

10        Figure 33 shows the regulation means when the holding means occupies the reproducing position, and figure (a) thereof is an operation explaining diagram showing a state of hindering the holding, and figure (b) thereof is an operation explaining diagram showing a state of canceling the hindrance;

15        Figure 34 is an operation explaining diagram showing a state where the holding means holds a CD due to cancellation of the hindrance by the regulation means ;

20        Figure 35 is an explanatory diagram showing a state that a releasing means and a separating means according to the present invention releases a CD and separates the CD from the tray at the same position as the CD catching position; and

25        Figure 36 is an explanatory diagram showing problems of a conventional recording/reproducing apparatus.

#### BEST MODE FOR CARRYING OUT THE INVENTION

30        An embodiment of a disc recording and/or reproducing apparatus according to the present invention is described with reference to the drawings in the following.

This embodiment is a disc player for reproducing

a sound which the present invention is applied to.

(A) Whole composition of a disc player

As shown in Figures 1 to 11, in a broad way a disc player comprises a case 1 for forming its appearance, a disc storing portion 3 disposed at the front part in the case 1 and consisting of a plurality of trays 2 (disc carrying means) each of which carries a CD, a transfer means 5 provided at an insertion/ejection opening 4 of the front face plate 1a of the case 1 and inserting or ejecting a CD into or from the disc storing portion 3, an opening/closing means 6 provided at the front side of the transfer means 5 and opening or closing the insertion/ejection opening 4 of the front face plate 1a, a reproducing means 7 provided at the back part in the case 1 and selecting and reproducing one out of CDs in the disc storing portion 3, a pushing-out means 8 being provided at the right and left sides of the back of the disc storing portion 3 and pushing out a CD to be ejected toward the transfer means 5, and an operation means 9 provided mainly outside the right and left side plates 1b and 1c of the case 1 and operating the disc storing means 3, the reproducing means 7 and the like.

The reproducing means 7 comprises a space forming means 11 disposed at both sides of a pickup elevator 10 rising and lowering for forming space over and under a CD to be reproduced out of a plurality of CDs in the disc storing portion 3, a holding means 14 (driving portion) which comprises an upper arm 12 and a lower arm 13 rotatably provided on the pickup elevator 10 and enters the space and holds a selected CD, a CD driving means 15 (driving portion) being attached to the lower arm 13 and rotationally driving a CD held, a pickup

unit 16 being provided on the lower arm 13 and reading information from a rotating CD, a turning force supplying means 17 for transferring a driving force of the transfer means 5 to the holding means 14 to turn a CD only in the reproducing mode out of the insertion/ejection mode being a state for inserting/ejecting a CD and the reproducing mode being a state for reproducing a CD, and a regulation means 18 for setting the time when the holding means 14 holds a CD.

(B) Case

First, the case 1 is described. The case 1 comprises a front face plate 1a, side plates 1b and 1c, a ceiling plate 1d and a bottom plate 1e, and its back is opened. And the side plates 1b, 1c and the bottom plate 1e are formed into one body.

(C) Disc storing portion

As shown in Figure 3(a), in this embodiment, the disc storing portion 3 comprises six trays 2 each being a disc carrying means and a disc elevator 22 carrying the six trays 2, and at the front part of the case 1, four guide poles 23 along the vertical direction as a supporting means are supported by joining both their ends to the bottom plate 1e and the ceiling plate 1d.

As shown in Figure 4, each tray 2 is formed by adhering a resin member 2b to the upper face of each of both side parts of a thin aluminum plate 2a. A pair of pins 2c and 2d projecting sideways are formed at a middle part and the backward part of each resin member 2b, and the pins being at the middle part are longer and the pins being at the backward part are shorter. The height of the resin member 2b is set nearly at the same as the thickness of a CD, and the front part of a

plate spring 2e (catching means for catching a disc) for catching a CD located between the resin member 2b and the aluminum plate 2a is fixed on the upper face of the resin member 2b.

5           A pressing portion 2f for pressing a CD is formed on the inside of the backward part of the plate spring 2e, while a receiving portion 2g to be pressed down by the lower face of a separating cam 82 described later and a receiving portion 2h to receive an upward  
10       force by the lower face of an upper stage entering portion 82j described later are formed on the outside of the back part of the plate spring 2e. Guide holes 2i for having the guide poles 23 inserted through into them are formed so as to pass through the resin member  
15       2b and the aluminum plate 2a respectively at the front part and the back part of the resin member 2b.

          A shock absorbing member unshown is adhered along a circular arc to parts of both faces of the aluminum plate 2a which the vicinity of the outer  
20       circumferential face of a CD is brought into contact with. At both ends of the resin member 2b on the top tray 2, as shown in Figure 3(a), cylindrical spring receivers 2j each receiving a coil spring 24 as an energizing means provided between the ceiling plate 1d  
25       and the top tray 2 are formed into one body with the resin member 2b, and as shown in Figure 3(b), the bottom of the spring receiver 2j projects slightly inside to form a receiving part 2k and this receiving part 2k receives the lower end of the coil spring 24.  
30       This is provided in order to prevent a load necessary for compressing the spring from becoming too large even if the length of compression is made large by using a long spring as the spring.

On the other hand, the disc elevator 22 is formed in a shape in which the right and left end parts of it are bent upward. Guide holes 22a for having the guide poles 23 inserted through into them are formed in the horizontal part of it and a pair of pins 22b projecting horizontally for lifting and lowering the disc elevator 22 are fixed on the outside of each of the right and left vertical parts. The pair of pins 22b are inserted through into two vertical slits 25 formed in each of the side plates 1b and 1c of the case 1 to project outside the case 1.

The disc elevator 22 and six trays 2 are supported so as to be freely lifted and lowered by inserting the guide poles 23 through into these guide holes 22a and 2i. And the upper and lower ends of four spring guides 26 are fixed respectively on the ceiling plate 1d and the bottom plate 1e of the case 1, and the spring guides 26 are respectively inserted through into the spring receivers 2j. And the lower end of a coil spring 24 as an energizing means provided so as to surround the spring guide 26 is in contact with the receiving part of the lower end of the spring receiver 2j.

(D) Transfer means

As shown in Figure 2, the transfer means 5 is provided on the front face plate 1a of the case 1. The front face plate 1a has the insertion/ejection opening 4 formed in it. A driving shaft 30 and a driven shaft 31 are rotatably supported at the insertion/ejection opening 4. Both ends of the driving shaft 30 are rotatably attached to the front face plate 1a. Both ends of the driven shaft 31 are inserted into slots 32 formed long in the vertical direction in the sides of

the front face plate 1a.

In order to support the middle parts of the driving shaft 30 and the driven shaft 31, as shown in Figure 5, a small-diameter portion in a middle part of the driving shaft 30 is rotatably fitted into a groove 33a in the back part of a resin bearing 33 restricted in downward movement, while a small-diameter portion in a middle part of the driven shaft 31 is rotatably fitted into a groove 34a in the back part of a resin bearing 34 capable of freely moving up and down through a pair of guide projections and a pair of grooves being unshown.

A pair of rollers 35 made of resin are attached to the driven shaft 31 and a pair of rollers 36 made of rubber are attached to the driving shaft 30, and both of them are restricted by unshown stop rings in sliding in the axial directions. A circumferential groove is formed in each end of the driven shaft 31 and both ends of a spring 38 for pressing the driven shaft 31 toward the driving shaft 30 are engaged with the circumferential groove and a spring engaging pin 37 fixed on each side of the front face plate 1a.

Means for driving the driving shaft 30 is described. As shown in Figure 6, a gear 39 is fixed on the right end of the driving shaft 30, and a gear 40, a gear 41, and gears 42 and 43 formed into one body are supported so as to freely rotate inside the right side plate 1c. A worm 44 engaged with the gear 43 and a gear 45 are rotatably supported as one body on the bottom plate 1e, and the gear 45 is engaged with a worm 47 fixed on the output shaft of a transfer motor 46 mounted on the bottom plate 1e.

In order to automatically perform an operation of

further pushing in a CD by a few millimeters more after insertion of the CD by the rollers 35 and 36 has finished, a pushing-in means 48 is provided as shown in Figures 2 and 5. Three pairs of guide slots 49, 50 and 51 each being in the shape of a long slot are formed along the horizontal direction respectively above and below the insertion/ejection opening 4 in the front face plate 1a.

A pair of slide stands 52 are provided on the right and left parts of the back of the front face plate 1a, and three guide pins 53, 54 and 55 fixed on each slide stand 52 are inserted into the guide slots 49, 50 and 51 so that they cannot be pulled out.

A vertical roller 57 made of resin is rotatably supported through a vertical shaft 56 at the back part of each of the slide stands 52. In order to push the pair of slide stands 52 toward each other, a pushing-in spring 60 is provided between a spring engaging portion 58 formed on the front face plate 1a and a spring engaging portion 59 formed on each slide stand 52.

A CD being at a height position where the vertical roller 57 is disposed is horizontally positioned by the vertical roller 57, but a CD below or above the vertical roller 57 is positioned by positioning rods 61 and 62 stood on the bottom plate 1e as shown in Figure 5 and a pair of unshown positioning rods attached to the ceiling plate 1d to hang from it (which are arranged on the extension lines of the positioning rods 61 and 62, and a space which a CD to be inserted or ejected passes through is formed between the positioning rods 61 and 62).

(E) Opening/closing means

An opening/closing means 6 for opening/closing

the insertion/ejection opening 4 of the front face plate 1a is described. As shown in Figure 2, a shutter 64 is provided so as to freely move up and down at the front side of the front face plate 1a. An opening 64a for making a CD pass through it is formed in the shutter 64, and when the shutter 64 rises, the middle height position of the opening 64a occupies the boundary position between the rollers 35 and 36 to bring an "opened" state, and when the shutter falls, a "closed" state is brought.

That is to say, a pair of upper and lower guide pins 65 are stood at each of the right and left parts of the front face plate 1a, while a pair of vertically long guide slots 64b are formed at each of the right and left parts of the shutter 64 and a stop ring is fitted onto the fore end of each guide pin 65 inserted through into each guide slot 64b.

In order to enable the interval between the pair of slide stands 52 to become large only when the shutter rises to be "opened", the pair of guide pins 54 near the center are made longer than the other guide pins 53 and 55, and L-shaped guide slots 64c for inserting the guide pins 54 into them are formed in the shutter 64.

In order to make the shutter 64 forcibly rise to be "opened" when the interval between the pair of vertical rollers 57 is expanded and a CD is forcibly ejected for some reason, a guide rail portion 64d is formed on the upper face of this guide slot 64c.

Next, a link mechanism for opening and closing the shutter 64 is described. Guide slots 66a being long in the right and left directions are formed in the front face and underside of a lateral (right and left)



slide plate 66 being nearly L-shaped in cross section, while guide pins 67 inserted into the guide slots 66a are fixed on the front face plate 1a and the bottom plate 1e.

5           A cam slot 64e is formed in the lower part at each side of the shutter 64, while a slide pin 66b is fixed on each end part at the front face of the lateral slide plate 66 and the slide pin 66b is inserted into the cam slot 64e. Spring engaging portions 66c and 68  
10       projecting downward as shown in Figure 17(b) are formed respectively on the underside of the lateral slide plate 66 and on the underside of the bottom plate 1e, and a return spring 69 is engaged between both of them.

          A longitudinal slide plate 70 is provided on the  
15       left underside of the bottom plate 1e so as to freely slide in the longitudinal (forward and backward) directions. That is to say, a pair of guide slots 70a are formed in the longitudinal slide plate 70, while an unshown gib-headed pin inserted into the guide slot 70a  
20       is fixed on the bottom plate 1e.

          A bent portion of a nearly L-shaped lever 72 is rotatably attached to the underside of the bottom plate 1e through a fixed shaft 73 as shown in Figure 5, and slots 72a and 72a are formed at the end parts of the  
25       lever 72. And pins 66d and 70b respectively fixed to the lateral slide plate 66 and the longitudinal slide plate 70 are slidably fitted into the slots 72a and 72a. A pressed portion 70c to be pressed by an outer slider 140 described later is formed in the longitudinal slide  
30       plate 70.

(F) Reproducing means

          A reproducing means 7 is arranged closely to the back of the disc storing portion 3 in order to make the

disc player as small in depth as possible. Since a holding means 14 in the reproducing means 7 is mounted on the pickup elevator 10 as shown in Figure 2, the pickup elevator 10 is first described.

5       The pickup elevator 10 is made by forming a horizontal plate and vertical plates at both sides of it into one body, and a cut-out portion 10a being in the shape of a circular arc is formed to allow a CD to come in at the front side of the horizontal plate. A pair of horizontally projecting pins 77 for lifting and lowering the pickup elevator 10 are fixed on each of the vertical plates. The pair of pins 77 are arranged at the same height and are made shorter than the pair of pins 22b of the disc elevator 22. These pins 77 are  
10       inserted through into a pair of vertical slits 78 formed in each of the side plates 1b and 1c of the case 1 to project outside the case 1.

(F-1) Space forming means (releasing means, separating means)

20       As shown in Figure 2, as a space forming means 11 for forming space over and under a selected CD by being inserted between trays 2 vertically stacked one over another, separating cams 82 made of resin are provided so as to freely slide in the longitudinal directions  
25       inside the vertical plates of both sides of the pickup elevator 10.

That is to say, a guide slot 10a is formed in the forward upper part of the vertical plate of the pickup elevator 10 and a gib-headed guide pin 82a inserted  
30       into the guide slot 10a is fixed on the separating cam 82, while a guide slot 82b is formed in the lower part of the separating cam 82 as shown in Figure 3 and a gib-headed guide pin 10b of Figure 2 inserted into the

guide slot 82b is fixed at an intermediate position in the longitudinal directions of the vertical plate.

The separating cams functions not only as a space forming means 11, but also as a releasing means and a  
5 separating means of the present invention, as described later.

The separating cams 82 are inserted toward the tray 2 and stably carry the tray 2 by pushing up four pins 2c and 2d at both sides of the tray 2 and form  
10 space over and under the tray 2 carrying a CD to be reproduced.

The separating cams 82 each are formed in such a shape that two plates different in length in the longitudinal directions, the plates each having a slit  
15 formed in it, are adhered to each other, and are composed so as to make the separating cams 82 slide into both sides of a tray 2 and thereby make the forward parts move up a pair of longer pins 2c and the backward parts move up a pair of shorter pins 2d.

That is to say, they are composed as follows. A pair of first separation control portions 82c1, 82c1 are formed in order to move up a selected tray 2 carrying a selected CD and trays 2 above this selected tray 2, and a pair of second separation control  
20 portions 82c2, 82c2 for moving up only the trays 2 above the selected tray 2 are formed above the first separation control portions 82c1.

Third separation control portions 82d, 82d for holding only the selected tray 2 are formed  
30 respectively between the first separation control portions 82c1 and the second separation control portions 82c2. An upper face 82f for holding the positions of the pins 2c and 2d of the tray 2 over the

selected tray 2 and a lower face 82h as a position control means for holding the positions of the pins 2c and 2d of the tray 2 under the selected tray 2 and pressing the receiving portion 2g of the plate spring 2e are formed along the direction of movement of the separating cam 82.

Since the pins 2c and 2d of the selected tray 2 and the tray 2 over the selected tray 2 are pushed up by the advance of the first and second separation control portions 82c1 and 82c2, they are originally set at a fixed value such as  $\theta = 45^\circ$  or the like, for example. In this case, however, the trays 2 are lifted as compressing the coil springs 24, and the higher the trays 2 are lifted, the more greatly the coil springs 24 are compressed and the load applied when pushing up the trays 2 becomes larger. In other words, the load is small at the initial stage of compressing the coil springs 24. As shown in Figure 21(a), therefore, the upper parts of the first and second separation control portions 82c1 and 82c2 take  $\theta_1 = 45^\circ$  for example, while the lower parts take  $\theta_2 = 60^\circ$  for example, and the intermediate parts between both of them are formed by arc-shaped faces 82t.

Next, the third separation control portions 82d, 82d are described. The third separation control portions 82d, 82d are composed of upper stage entering portions 82j, 82j, intermediate stage entering portions 82k, 82k and lower stage entering portions 82m, 82m (separating means). The upper stage entering portions 82j, 82j are used for forming space over and under a selected tray 2, the intermediate stage entering portions 82k, 82k are used for lowering the selected tray 2 and a selected CD and placing the selected CD on

a turntable 97 of a lower arm 13, and the lower stage entering portions 82m, 82m are used for lowering again only the selected tray 2 and separating the selected tray 2 from the selected CD.

5           As mentioned later, there is provided a peripheral portion 82x (releasing means) for pushing up the receiving portions 2h of the plate springs 2 of the selected tray 2 according to the advance of the separating cams 82 under the upper stage entering  
10 portions 82j.

(F-2) Holding means

          The holding means 14, which is turned toward the space formed over and under a selected CD by the space forming means 11 and holds the selected CD, is  
15 described. The base end portions of the lower arm 13 and an upper arm 12 are turnably attached to the left part of the pickup elevator 10. That is to say, they are made as follows.

          As shown in Figure 8, the vicinity of the lower  
20 end of a hollow shaft 86 is fixed on the lower arm 13, and the lower end of this hollow shaft 86 penetrates the pickup elevator 10 so as to freely turn and has a flat washer 93 and a stop ring 94 attached to it for preventing it from slipping out. And a sleeve 87 made  
25 of a copper alloy penetrates and is fixed to the base end portion of the upper arm 12, and a selected CD is held between the lower arm 13 and the upper arm 12 descending in parallel with the lower arm 13 by keeping the hollow shaft 86 inserted through into the sleeve 87.

30           The upper end portion of the hollow shaft 86 penetrates a flat washer 88 and has a stop ring attached to it and, a holding spring 89 for pressing downward the upper arm 12 is provided between the flat

washer 88 and the sleeve 87.

A sliding pin 90 stood on the lower arm 13 as shown in Figure 7 is slidably inserted through into a slot 91 formed in the upper arm 12 so that the lower arm 13 and the upper arm 12 are turned around the hollow shaft 86 synchronously with each other as one body without turning relative to each other. In order to improve the accuracy of positioning a turntable 97 described later on the lower arm 13 and a CD when the holding means 14 is turned, a supporting pole 92 stood on the bottom plate 1e is inserted through into the hollow shaft 86 on the pickup elevator 10.

#### (F-3) Disc driving means

A disc driving means 15 is provided on the upper face of the fore end portion of the lower arm 13. That is to say, a spindle motor 96 is mounted as shown in Figure 7, and a turntable 97 to be fitted into the central hole of a CD is mounted on the output shaft of the spindle motor 96. On the other hand, one end of a supporting plate 98 is fixed to the vicinity of the fore end of the upper arm 12 as shown in Figure 34, and the other end portion has a circular hole formed in it.

A chuck plate 99 made of resin and having a ridge-shaped convex portion formed along a circle on the underside of a disc is freely turnably fitted into the hole from above. This chuck plate 99 is prevented from slipping out by one end of an unshown spring plate fixed at the other end of it on the underside of the upper arm 12.

#### 30 (F-4) Pickup unit

A pickup unit 16 is also mounted on the upper face of the lower arm 13 as shown in Figure 9. The composition of the pickup unit 16 is described in the

following. An optical pickup 162 is provided so as to freely move along the direction of length of the lower arm 13 through a guide rail 161 formed into one body with the lower arm 13. And a means for making the  
5 optical pickup 162 reciprocate along the guide rail 161 is provided.

A screw shaft 164 is turnably supported on the upper face of the lower arm 13 through a pair of bearing members 163, and an unshown internal thread  
10 portion of the optical pickup 162 is screwed onto the screw shaft. The output shaft of a scanning motor 165 fixed near the sleeve 87 is geared to this screw shaft 164.

That is to say, a gear 168 having a worm wheel  
15 166 and a screw gear 167 formed into one body is freely turnably supported, and a worm 169 of the output shaft is engaged with the worm wheel 166, while a screw gear 170 attached to the screw shaft 164 is engaged with the screw gear 167.

20 (F-5) Turning force supplying means

The composition of a turning force supplying means 17 for turning the holding means 14 with the driving force of the transfer motor 46 is described in the following. A gear train 103 is provided inside the  
25 left side plate 1b of the case 1 as shown in Figure 6. That is, the gear train 103 is composed of gears 103a to 103h.

On the other hand, a gear 104 is also fixed on the left end of the driving shaft 30. A plate 105 is  
30 provided so as to freely move in the vertical directions inside the left side plate 1b. That is, a vertically long guide slot 105a is formed in the upper part of the plate 105, and a guide pin 106 (see Figure

28) inserted through into the guide slot 105a is fixed on the left side plate 1b and a stop ring is attached to the guide pin 106.

Spring engaging portions 105b and 107 are  
5 respectively provided on the lower parts of the plate 105 and the bottom plate 1e of the case 1, and a return spring 108 for pulling down the plate 105 is provided between both of them.

A relief hole 105c, into which a shaft 109 (fixed  
10 on the side plate 1b) of the gear 103h is inserted, is formed in the plate 105, and the base end portion of a lever 110 is turnably attached to the shaft 109. A moving shaft 111 penetrating the lever 110 is fixed on the fore end portion of this lever 110, and a gear 112  
15 engaged with the gear 103h is turnably attached to the moving shaft 111.

A cam slot 105d is formed above the relief hole 105c in the plate 105, and a penetrating end portion of the moving shaft 111 is inserted through into the cam  
20 slot 105d. That is, when the plate 105 is moved up, the cam slot 105d is moved up and the moving shaft 111 inserted in the cam slot 105d is moved forward and thereby the gear 112 attached to the moving shaft 111 comes to be engaged with a gear 104 of the driving  
25 shaft 30.

In order to move up this plate 105, a middle portion of a lever 113 is turnably supported on the inside of the left side plate 1b through a pin 114, and one end of the lever 113 is turnably coupled to the  
30 lower portion of the plate 105 through a pin 115.

The other end of the lever 113 faces the lower part of the forward guide slot of a pair of guide slots 25 of the left side plate 1b, the guide slot having a



pin 22b of the disc elevator 22 inserted into it. That is, when the disc elevator 22 comes to the lowest position to be in a reproducing mode, the pin 22b presses down the other end of the lever 113 to engage the gear 112 with the gear 104.

Next, the highest gear 103a of the gear train 103 and the lower arm 13 of the holding means 14 are geared to each other as described in the following.

As shown in Figure 2, a slide bar 116 composed of a vertical portion being long in the longitudinal directions and a horizontal portion being formed into one body with the vertical portion in the back part of the vertical portion is provided as shown in Figure 2.

A pair of guide slots 116a are formed near both ends of the vertical portion of the slide bar 116, and as shown in Figure 5, a pair of guide pins 117 inserted into the pair of guide slots 116a are fixed on the inside of the left side plate 1b and have stop rings attached to them. In such a way, a rack 116b is formed on the forward underside of the slide bar 116 capable of freely sliding in the longitudinal directions and is engaged with the gear 103a, while the upper end of an engaging pin 116c projecting downward is fixed to the end portion of the backward horizontal portion.

This engaging pin 116c is slidably fitted into a slot 13a of a horizontal portion which is formed as one body at the base end portion of the lower arm 13 and extends to the height of the upper arm 12. This slot 13a is formed long along a radial line which passes the axis of the sleeve 87 and is perpendicular to the sleeve 87.

The disc player has two operation modes including an insertion/ejection mode for inserting or ejecting a

CD into or from the disc storing portion 3 and a reproducing mode for reproducing a CD, and the holding means 14 occupies position B as shown in Figure 30 in the former mode and occupies position A as shown in Figure 31 in the latter mode.

The turning operation of the holding means 14 between position B and position A is performed through the turning force supplying means 17 as described above. Since it is necessary to accurately position a selected CD and the turntable 97 on the lower arm 13, however, a positioning means 118 of Figure 10 is provided.

The structure of the positioning means 118 is described in the following. As shown in Figures 9 and 10, the upper end of a positioning pin 119 projecting downward is fixed on the lower arm 13 near the hollow shaft 86. On the other hand, a circular-arc slot 10c is formed in a part of the pickup elevator 10 corresponding to a range in which the positioning pin 119 moves when the holding means 14 is turned, and the positioning pin 119 is slidably fitted into the circular-arc slot 10c.

A spring engaging portion 10d projecting downward is formed on the pickup elevator 10, and both ends of a toggle spring 120 are engaged with the spring engaging portion 10d and the positioning pin 119. Assuming that a position occupied by the positioning pin 119 when the holding means 14 occupies position B or A is position b or a, position c being a middle point between b and a is an inflection point at which the direction of movement of the positioning pin 119 and the spring engaging portion 10d is arranged at a position corresponding to position c.

(F-6) Regulation means

The upper arm 12 of the holding means 14 is pressed downward by the holding spring 89, and a regulation means 18 for setting the time when the upper arm is to be lowered by the pressing force of this holding spring 89 is provided as shown in Figure 7. That is to say, this is composed as follows.

A cylindrical plate 124 is stood between the holding means 14 and the separating cam 82 on the upper face of the pickup elevator 10. This cylindrical plate 124 forms a partial cylinder being a part of a cylinder having the sleeve 87 as its center, and as shown in Figures 32 and 33, the cylindrical plate 124 has an L-shaped guide slot 125 formed in it, the slot being composed of a horizontal portion 125a being long in the circumferential direction and a vertical portion 125b long in the axial direction.

On the other hand, a guide pin 12a projecting outside in the direction of a radius having the sleeve 87 as its center is fixed on the base end portion of the upper arm 12, and the guide pin 12a is inserted in the guide slot 125.

Due to this, since the guide pin 12a is located on the horizontal portion 125a when the holding means 14 occupies position B being a standby position and while it moves from position B to a position just on this side of position A in Figure 7, even if the upper arm 12 is pressed by a pressing force of the holding spring 89, it is not lowered and the holding means 14 is kept in the opened state. On the other hand, since the guide pin 12a is located in the vertical portion 125b when the holding means 14 comes to position B, the upper arm 12 is lowered by the pressing force of the holding spring 89 and the guide pin 12a also results in

descending to the lower end of the vertical portion 125b.

In order to make the holding means 14 not immediately perform a holding operation even when the holding means 14 turns to position A of Figure 7 and the guide pin 12a turns to the vertical portion 125b of the guide slot 125 but make the holding means 14 perform a holding operation at last when it is given a command, a first regulation means for temporarily regulating the downward movement of the guide pin 12a and a second regulation means for removing the regulation and making the holding means 14 hold a selected CD when after the regulation the separating cam 82 moves forward and then the selected CD and the selected tray 2 are lowered and placed on the turntable 97 are provided. That is to say, they are composed as follows.

As shown in Figures 7 and 30, a bearing plate 126 is stood in parallel with the separating cam 82 between the cylindrical plate 124 and the separating plate 82 on the upper face of the pickup elevator 10. A middle portion of a restriction lever 127 is turnably supported on the inside of the bearing plate 126 through a turning shaft 129 as shown in Figure 7, and a pin 127a projecting outside is fixed on the forward part of the restriction lever 127, and the backward part of the restriction lever 127 is curved inside and faces the vertical portion 125b of the guide slot 125.

And a spring 128 for pressing downward the backward part of the restriction lever 127 is provided as shown in Figure 30. On the other hand, the pin 127a of the forward part of the restriction lever 127 is loosely fitted into a cam groove 82r formed in the

lower inside portion of the separating cam 82 as shown in Figure 32. A relief portion is formed in the upper part at the back side of this cam groove 82r, and when the separating cam 82 moves forward and the pins 2c and 2d of the selected tray 2 enter the intermediate stage entering portions 82k and 82k, a state where the pin 127a can be relieved into the relief portion of the cam groove 82r is brought and the restriction lever 127 is turned by the spring 128 and the upper arm 12 is lowered by the pressing force of the holding spring 89.

(G) Pushing-out means

The pushing-out means 8 is provided at each of the right and left insides of the case 1. Since these parts of both sides are nearly the same in composition as each other, only one of them is described. As shown in Figures 1 and 19, a pushing-out lever 132 for pushing out a CD by its turning is turnably attached to a fixed shaft 133 projecting downward from the ceiling plate 1d of the case 1. The height of the pushing-out lever 132 is set at the same as the height between the rollers 35 and 36.

Both ends of a return spring 134 provided so as to surround the fixed shaft 133 are engaged with a spring engaging portion 132a formed on the pushing-out lever 132 and a spring engaging portion formed on the ceiling plate 1d.

On the other hand, this mechanism is composed so that the pushing-out lever 132 is turned by a backward movement of the separating cam 82 being opposite to the action of forming space by a forward movement of the separating cam 82 as described up to now. That is to say, the composition is as follows.

As shown in Figure 7, a plate 135 is provided so

as to freely slide forward and backward by a fixed distance outside the bearing plate 126. In other words, a pair of guide slots 126a are formed in the bearing plate 126, while a guide pin 135a inserted into each  
5 guide slot 126a is fixed on the plate 135. The front end portion of the plate 135 is bent inside so as to be engaged with a pressed portion 132b formed into one body with the pushing-out lever 132, and the back end portion of the plate 135 is bent outside to project  
10 toward the back of the separating cam 82.

(H) Operation means

Finally, an operation means 9 is described. This operation means 9 lifts and lowers the disc elevator 22 to enable a CD on a tray 2 on each stage to be inserted  
15 and ejected and further opens the opening/closing means 6 and operates the pushing-out means 8 in the insertion/ejection mode, and lifts and lowers the pickup elevator 10 to select a CD to be reproduced, further operates the space forming means 11 and  
20 operates the regulation means 18 in a state where the disc elevator 22 is kept at the lowest position in the reproducing mode.

As shown in Figures 2 and 11, inner sliders 139 (first control plates) and outer sliders 140 (second  
25 control plates) are provided outside the left and right side plates 1b and 1c of the case 1 so as to freely slide forward and backward. Since they are respectively symmetrical to each other at the left and reight sides, one side of them is described. Guide  
30 slots 139a and 140a are formed in the upper and lower parts of the inner and outer sliders 139 and 140 respectively, and guide pins 158 and 159 fixed on the side plate are respectively inserted into both of the

guide slots 139a and 140a, and have stop rings attached to them.

5 A pair of stepped slits 141 (position control portion) for stepping up a pair of pins 77 of the pickup elevator 10 at six steps, the pins 77 projecting from the vertical slits 78, are formed in the backward part of the inner slider 139. A pair of stepped slits 142 (position control portion) for stepping up a pair of pins 22b of the disc elevator 20 at six steps, the pins 22b projecting from the vertical slits 25, are formed in the forward part of the inner slider 139, and bottom slits 143 for keeping the disc elevator 22 at the lowest position and making only the pickup elevator 10 rise and fall in the reproducing mode are formed continuously with and under the stepped slits 142, respectively.

On the other hand, only slits, into which a pair of pins 22b being longer pins of the disc elevator 22 are inserted, are formed in the outer slider 140. That is to say, a pair of tetragon-shaped slits 144 used in the insertion/ejection mode for putting the pair of pins 22b into the stepped slits 142 and moving up and down them, a pair of horizontal line-shaped slits 145 used in the reproducing mode for putting the pins 22b into the bottom slits 143 and keeping them at the lowest position, and a pair of 45°-inclined changeover slits 146 (mode changeover portion) for changing over the positions of the pair of pins 22b between the pair of stepped slits 142 and the pair of bottom slits 143 by moving up or down the pins 22b by means of tapered faces 146a and 146b through sliding the outer slider 140 in either direction are respectively formed continuously with one another.

Since the reproducing mode slits 145 overlap each other to be continuous with each other if these slits 145 are formed at the same vertical position, the reproducing mode slits 145, the insertion/ejection mode  
5 slits 144, the bottom slits 143, the stepped slits 142 and the pins to be inserted into them are different in height from one another.

The upper back portion of the outer slider 140 is bent perpendicularly inside to form a projecting  
10 portion 140b. A relief cutout portion 139b and a relief slit 147 are formed respectively in the backward parts of the inner slider 139 and the side plate 1b so that this projecting portion 140b can be moved together with the outer slider 140.

15 In order to enable the separating cam 82 to slide together with the outer slider 140 regardless of the height position of the separating cam 82 moving up and down together with the pickup elevator 10, an engaging groove 82s is formed along the vertical direction in  
20 the outside face of the backward part of the separating cam 82 as shown in Figure 2 and the projecting portion 140b is slidably fitted into the engaging groove 82s. And an engaging portion 140c is formed by bending the front portion of the left outer slider 140 toward under  
25 the bottom plate 1e of the case 1.

This engaging portion 140c presses backward the pressed portion 70c and opens the shutter 64 against the pressing force of the return spring 69 when the outer slider 140 slides backward.

30 Next, a driving mechanism for sliding the right and left inner sliders 139 and the right and left outer sliders 140 at the same time synchronously with each other is described. As shown in Figures 2 and 6, two



coupling shafts 148 and 149 are rotatably supported through two pairs of bearings under the backward part of the bottom plate 1e of the case 1.

Pinions 150 and 151 are fixed respectively to  
5 both ends of the coupling shafts 148 and 149, and these pinions 150 and 151 are engaged respectively with racks 139c and 140d formed on the lower parts of the backward portions of the inner sliders 139 and outer sliders 140. Gears 152 and 153 are fixed respectively on the  
10 coupling shafts 148 and 149, and operation motors 154 and 155 are individually geared to these gears 152 and 153. That is to say, they are composed as follows.

The operation motors 155 and 154 are mounted at the upper and lower positions inside the bearing plate  
15 126 arranged at the right side of the backward portion of the case 1, and the output shafts of these motors 155 and 154 are respectively geared to the gears 152 and 153 through two sets of reduction gear means 156 and 157 provided inside the bearing plate 126. The  
20 holding means of the present invention in the above-mentioned embodiment comprises the plate springs 2e and the pressing portions 2f, and the releasing means and the separating means comprises the separating cams 82.

25 Next, operation of such a disc player is described.

(I) Whole composition of the operation

The operation of the disc player is composed of three operations including the insertion of a CD into  
30 the disc storing portion 3, the ejection of a CD from the disc storing portion 3 and the reproducing of a CD which selects and reproduces one CD out of a plurality of CDs stored in the disc storing portion 3.

(J) Insertion of a CD

In case of inserting a CD into the disc storing portion 3, a number given to a tray 2 (numbers 1 to 6 are given to the trays 2 in order of height from the top to the bottom) is selected and an unshown number button, for example, button "2" is pressed and then an unshown insertion button is pressed.

The action that the rotation of the output shaft of the operation motor 154 is transferred to the reduction gear means 156 and the coupling shaft 148 and the pair of inner sliders 139 slide, and the action that the rotation of the output shaft of the operation motor 155 is transferred to the reduction gear means 157 and the coupling shaft 149 and the pair of outer sliders 140 slide are performed separately from and independently of each other.

If a button is pressed when the pair of pins 22b enter the pair of insertion/ejection mode slits 144 of the outer slider 140 and for example as shown in Figure 12 the pair of pins 22b are at the mode changeover position in the insertion/ejection mode, the inner slider 139 moves backward and thereby the pair of pins 22b each rise to the second step from the bottom of the stepped slit 142 as shown in Figure 13(a), and simultaneously with this, the disc elevator 22 also rises and a CD on the second tray 2 from the top is set to the height of the pushing-out lever 132.

At this time the pickup elevator 10 also rises at the same time, but this action is an unnecessary action. When the inner slider 139 is moved further backward, the pickup elevator 10 rises together with the pins 22b and the third to sixth trays 2 come to the height of the pushing-out lever 132 in order.

Next, when the outer slider 140 moves backward until the pin 22b comes from the standby position of Figure 13(a) to an intermediate position in the forward and backward directions of the insertion/ejection mode slit 144, since the engaging portion 140c of the outer slider 140 presses backward the pressed portion 70c shown in Figure 2 under the bottom plate 1e, the movement of the longitudinal slide plate 70 is transferred to the lateral slide plate 66 through the lever 72 and the lateral slide plate 66 moves to the left against the pulling force of the return spring 69, and the shutter 64 rises and the insertion/ejection opening 4 is opened as shown in Figure 17(b).

Since due to the above action the shutter 64 is opened and the second tray 2 from the top has already come to the same height as the pushing-out lever 132 as described above, when attempting to insert a CD 171 between the upper and lower rollers 35 and 36 as shown in Figure 17(a), an unshown sensor arranged in the center on this side of the shutter 64 detects the CD 171 and the transfer motor 46 starts turning.

Since the turning force of the transfer motor 46 is transferred to the roller 36 through the gears, the CD 171 is pulled in between the roller 36 and the roller 35 pressed to the roller 36 by the spring 38 as shown in Figure 18 and the CD is inserted onto the second tray 2 by the rotation of the rollers 35 and 36, but since the CD 171 is only inserted just apart from the rollers 35 and 36 it is pushed in by several millimeters more by a pair of vertical rollers 57 pressed toward the center by the pushing-in springs 60.

The CD 171 is caught on the tray 2 by catching portions 2f of the pair of plate springs 2e. When the

CD 171 leaves the rollers 35 and 36, an unshown limit switch operates and the transfer motor 46 stops turning and at the same time the outer slider 140 moves forward and returns to the standby position of Figure 13(a),  
5 and therefore the pressed portion 70 which has been pressed backward is released and the shutter 64 is closed by the action of the return spring 69.

In case that the pair of pins 22b occupies another height position (first or third to sixth from  
10 the bottom) of the stepped slits 142 also, a CD can be inserted by the same operation as described above.

(K) Ejection of a CD

In case of ejecting a CD from the disc storing portion 3, for example, number button "2" and the  
15 ejection button are pressed. Thereupon, in the same way as the insertion, the pin 22b moves for example from the changeover position in the insertion/ejection mode of Figure 12 to the standby position of Figure 13(a) and the CD on the second tray 2 from the top is  
20 set to the height of the pushing-out lever 132. And in the same way as described above, when the outer slider 140 moves backward until the pins 22b come to the position shown in Figure 13(b), the shutter 64 is opened. The operation up to here is entirely the same  
25 as the operation of inserting a CD.

Next, when the outer slider 140 further moves backward until the pins 22b come to the forward parts of the insertion mode slits 144 as shown in Figure 14, as shown in Figure 19 the separating cam 82 geared to  
30 the outer slider 140 through the projecting portion 140b of the back portion of the outer slider 140 moves backward and the back of the separating cam 82 presses the back of the plate 135 to move backward.

Hereupon, the front portion of the plate 135 presses backward the pressed portion 132b of the pushing-out lever 132, and the pushing-out lever 132 is turned to push out each side of the second CD 171.

5 Since the rollers 35 and 36 are already turning due to a fact that the transfer motor 46 is turned at the same time when the ejection button is pressed, the CD pushed out is inserted between the rollers 35 and 36 and ejected as shown in Figure 20.

10 In order to prevent the ejected CD 171 from falling, when a part of the backward portion of the CD 171 is between the rollers 35 and 36 an unshown limit switch detects this and the transfer motor stops turning. After this, the CD 171 results in being pulled out by  
15 hand from between the rollers 35 and 36.

When an unshown sensor detects that the CD 171 has been extracted, the outer slider 140 moves forward and the pins 22b return from the position of Figure 14 to the standby position of Figure 13(a).

20 Thereupon, since the backward force applied from the separating cam 82 to the plate 135 is removed, the pushing-out lever 132 is turned by the elastic force of the return spring 134 and returns to the original position shown by a solid line in Figure 19(a), and  
25 subsequently the shutter 64 is closed in the same way as after the insertion of a CD.

In case that the pair of pins 22b occupies another height position (first or third to sixth from the bottom) of the stepped slits 142 also, a CD can be  
30 ejected by the same operation as described above.

(L) Reproducing of a CD

In order to reproduce a CD, a number button given the number of a CD to be reproduced, for example,

button "2" and the reproducing button are pressed.  
Hereupon, the inner slider 139 moves forward from the  
state of Figure 13(a) and thereby the pins 22b descend  
to the lowest position of the insertion/ejection mode  
5 slit 144 to come to the mode changeover position and  
thereafter the outer slider 140 moves forward.

Hereupon, the pins 22b are lowered by pressing  
the upper tapered faces 146b of the changeover slits  
146 (see Figure 11(c)) and are moved into the bottom  
10 slits 143 and at the same time these pins 22b are moved  
into the reproducing mode slits 145 of the outer slider  
140 and change over to the reproducing mode as shown in  
Figure 15(a). During this changeover, the pair of pins  
77 of the pickup elevator 10 stay at the lowest  
15 positions of the stepped slits 141.

The positions of the pins 22b at this time are  
the changeover positions in the reproducing mode to the  
insertion/ejection mode, and when the outer slider 140  
is made to move backward from this state, the pins 22b  
20 are lifted by pressing the lower tapered faces 146a of  
the changeover slits 146 and can return to the  
changeover position in the insertion/ejection mode as  
shown in Figure 12.

The positions of the pins 22b relative to the  
25 outer slider 140 shown in Figure 15(a) are not only the  
mode changeover positions but also the CD selection  
positions for changing only the height of the pickup  
elevator 10 and selecting a CD to be reproduced.

In other words, when only the inner slider 139 is  
30 made to move backward from the position of Figure 15(a),  
the pair of pins 22b seem to relatively move forward in  
the bottom slits 143 but are actually kept at the  
lowest positions of the vertical slits 25, and

therefore the disc elevator 22 stays at the lowest reproducing position but the other pair of pins 77 hidden by the outer slider 140 not to be seen seem to relatively rise along the stepped slits 141 but

5 actually rise along the vertical slits 78 by steps.

That is to say, when the pair of pins 22b are located at the positions corresponding to the numbers 1 to 6 given to the positions of the bottom slits 143 by making the inner slider 139 move backward, the pair of  
10 pins 77 rise or descend to the heights corresponding to the numbers 1 to 6 given in the vertical direction and a CD corresponding to the relevant number comes into a state where it can be reproduced. Figure 15(a) is a state where a CD of number 6 can be reproduced, and  
15 Figure 15(b) is a state where a CD of number 1 can be reproduced.

Since a CD of number 2 is selected here as described above, the pair of pins 77 rise to the second position from the top as shown in Figure 16(a). As a  
20 result of the above operation, a CD to be reproduced comes into a state where it can be reproduced, and the operation following this is the same also in case that a CD of any number is selected, and is performed by the movement of the outer slider 140 and the driving of the  
25 transfer motor 46.

The action after the waiting state of Figure 16(a) in which a CD of number 2 to be reproduced is selected is described in the following. A state where the pin 22b occupies position D on the outer slider 140  
30 of Figure 16(b), namely, a state of Figure 16(a) is the waiting state, and at this time the separating cam 82 is at the position of Figure 22, and when the outer slider 140 moves forward and the pin 22b comes to

position E as the first stage, the separating cam 82 moves forward and the lower front end of the backward portion of the separating cam 82 enters between the pins 2d of the second and third trays 2 from the top (as for pins 2c also, the lower front end of the forward portion of the separating cam 82 enters between the pins 2c and the following operation is performed in the same way as pins 2d), and next, when the pin 22b comes to position F as the second stage, the pin 2d of the second tray 2 from the top slides on the first separating control portion 82c1 and mounts the upper stage entering portion 82j and the upper front end of the separating cam 82 enters between the pins 2d of the first and second trays 2 from the top to come into a state of Figure 23, and next, when the pin 22b comes to position G as the third stage, the pin 2d of the first tray 2 from the top slides on the second separating control portion 82c2 and mounts the upper face 82f of the separating cam 82. Due to this, when the pin 22b comes to position G at the third stage, space is formed over and under the selected second tray 2 from the top as shown in Figure 24.

When an unshown sensor detects that the pin 22b has come to position G of Figure 16(b), the transfer motor 46 starts turning. Since a state where the pair of pins 22b enter the bottom slits 143 and the lever 113 of the turning force supplying means 17 is pressed down has been brought when the operation mode is changed over to the reproducing mode as described above, a state has been already brought where the lever 113 is turned counterclockwise around the pin 114 from a state of Figure 28(a) and the plate 105 rises and the lever 110 is turned clockwise around the shaft 109 and the



gear 112 is engaged also with gear 104 as being engaged with the gear 103h as shown in Figure 28(b).

Accordingly, the rotation of the transfer motor 46 is transferred to the slide bar 116 having a rack 116b through the driving shaft 30 and the gear train 103, and the slide bar 116 moves backward as shown in Figure 29. Hereupon, since the engaging pin 116c of the lower backward portion of the slide bar 116 is slidably fitted in a slot 13a, the holding means 14 is turned forward and when the positioning pin 119 of Figure 10(a) passes position c being the inflection point, the pressing force of the toggle spring 120 acts in the opposite direction and the positioning pin 119 is turned to position a as shown in Figure 10(b), and as shown in Figure 24, the upper arm 12 and the chuck plate 99, and the lower arm 13 and the turntable 97 come in respectively above and below a CD 171 to be reproduced.

Showing this with plan views, the state is changed over from Figure 30 to Figure 31. The transfer motor 46 stops turning due to an unshown limit switch for detecting the turning of the holding means 14.

When the outer slider 140 moves forward until the pin 22b comes to position H of Figure 16(b) as the fourth stage, the pin 2d of the selected tray 2 descends into the intermediate stage entering portion 82k and thereby the selected tray 2 and the selected CD descend and the selected CD mounts the turntable 97 as shown in Figure 25.

At the generally same time as this, the outer slider 140 and the separating cam 82 move forward, and thereby the regulation means 18 operates and the upper arm 12 of the holding means 14 is moved down by the

action of the holding spring 89 and the CD to be reproduced is held between the turntable 97 and the chuck plate 99.

That is to say, a detailed description of the holding operation is as follows. When the pin 22b is at position G and the holding means 14 occupies the standby position B, the guide pin 12a is located at the horizontal portion 125a of the guide slot 125 as shown in Figure 32, and when the holding means 14 occupies the reproducing position A, the guide pin 12a moves to the vertical portion 125b of the guide slot 125 as shown in Figure 33(a), but since the pin 127a cannot be relieved to the relief part of the cam groove 82r of the separating cam 82, the guide pin 12a cannot descend due to hindrance of the back face of the restriction lever 127.

Next, when the pin 22b moves to position H, since the separating cam 82 also moves forward, the pin 127a can be relieved to the relief portion of the cam groove 82r as shown in Figure 33(b) and the pin 127a of the restriction lever 127 pressed by the spring 128 moves up toward the relief portion of the cam groove 82r of the separating cam 82 and the backward part of the restriction lever 127 descends. Due to this, as shown in Figure 34 the upper arm 12 pressed by the holding spring 89 descends and the selected CD 171 is held as described above.

The turning center of the holding means 14 is positioned at a high accuracy on the bottom plate 1e by inserting the pole 92 stood on the bottom plate 1e into the hollow shaft 86 being the turning center of the holding means 14, and the positioning pin 119 is held in a state where it is pressed against the pickup

elevator 10 by the toggle spring 120, and therefore the turntable 97 and the chuck plate 99 are accurately positioned on a circumferential locus.

On the other hand, since the guide pole 23 for  
5 guiding a tray 2 carrying a CD 171 is also stood on the bottom plate 1e in the same way as the pole 92, the CD 171 is also accurately positioned on the bottom plate 1e. Therefore, the center of the CD 171 to be reproduced, the center of the turntable 97 and the  
10 center of the chuck plate 99 coincide accurately with one another, and the CD 171 is securely held.

As the final fifth stage, when the outer slider 140 moves forward until the pin 22b comes to position I of Figure 16(b), the pin 2d of the selected tray 2  
15 descends into the lower stage entering portion 82m as shown in Figure 21(a) and the selected tray 2 which has been in contact with the selected CD until that time descends as shown in Figure 26 to leave the selected CD 171 and at the same time, the receiving portion 2h of  
20 the plate spring 2e which has pressed the selected CD 171 is pushed up by the lower face of the upper stage entering portion 82j of the backward portion of the separating cam 82 and thereby the selected CD is released as shown in Figure 27. An essential part  
25 under this state is shown in Figures 35(a) and 35(b).

Since at this time the trays 2 under the selected tray 2 are pressed by the underside 82h of the separating cam 82 and the trays 2 over the selected tray 2 are pressed down by the coil spring 24, the  
30 trays 2 are prevented from vibration caused by vibration of a vehicle.

After the selected CD is held by the holding means 14 in such a way, the CD is reproduced in a state

where the holding means 14 is held at position A as shown in Figure 31. When the spindle motor 96 rotates first, the CD is rotated through the turntable 97.

Next, when a motor 165 for scanning the pickup unit 16 rotates, its rotation is transferred to the screw shaft 164 and the optical pickup 162 moves along the screw shaft 164 from the inside toward the outside in a radial direction of the CD, and the reproducing of the CD is performed.

As described above, the selected CD 171 is easily and smoothly reproduced at the same position as the position held on the selected tray 2. Therefore, it is not necessary to produce a clearance by moving the CD in the plane direction as done in the conventional method shown in Figure 35. Further it is possible to decrease the side of the apparatus and thereby making the apparatus small in size.

After the CD has been reproduced, when the screw shaft 164 is reversely turned and the optical pickup 162 returns to its original position, the scanning motor 165 stops turning and the spindle motor 96 also stops turning. After this, according to a reverse procedure to the above-mentioned procedure, the outer slider 140 moves backward and the separating cam 82 also moves backward.

As shown in Figure 21(b), when the pin 127a returns from position H to position G, the pin 127a of the restriction lever 127 which has been at the position of Figure 33(b) comes off from the relief portion of the separating cam and moves down as shown in Figure 33(a) and the backward part of the restriction lever 127 moves up. Due to this, the guide pin 12a projecting outside from the holding means 14 is

pushed up along the vertical portion 125b of the guide slot 125 and the holding means 14 comes into a state where it can be turned.

After this, an unshown sensor detects that the  
5 guide pin 12a has moved up, the transfer motor 46 is turned in the reverse direction to the above-mentioned direction and the holding means 14 is turned to the backward side. And when the positioning pin 119 which has occupied position a of Figure 10(b) passes position  
10 c being the inflection point, the pressing force of the toggle spring 120 acts in the opposite direction and turns the positioning pin 119 to position b as shown in Figure 10(a), and the holding means 14 returns to position B being the standby position.

15 Due to an unshown limit switch for detecting the turning of the holding means 14, the transfer motor 46 stops turning. Since the holding means 14 is pressed backward by the toggle spring 120 even at the standby position, it is not influenced by vibration of the  
20 vehicle.

After this, when the outer slider 140 moves backward and the pin 22b returns to the standby position D of Figure 16(b), the separating cam 82 also moves backward and all the first to third trays 2  
25 descend and return to the state of Figure 22 where the six trays 2 are not separated.

In case of reproducing a CD other than the second CD from the top, the inner slider 139 is made to move forward or backward from the state of Figure 16(a) and  
30 the pin 22b is made to relatively move to one of positions 1, 3, 4, 5 and 6 given to the inner slider 139 in the figure, and thereafter the outer slider 140 is slid and positions D to I on the outer slider 140 of

Figure 16(b) are fitted to the pin 22b in order, and thereby the same operation as described above can be repeated.

As described above, the caught state of the disc  
5 is released at the generally same position generally as the caught position of the disc without moving in the plane direction, and the disc mounting means is separated from the disc. Therefore, since it is possible to execute the reproducing and recording  
10 operations by turning the disc at the generally same position as the disc caught position, it becomes unnecessary to move the disc in the radial direction (plane direction) during the reproducing and recording operations. This enables the storage dimension in the  
15 radial direction of the disc to be small, and therefore it becomes possible to largely decrease the apparatus in size.

By making the changeover slit 146 longer, it is possible to make higher the lowest position of the  
20 insertion/ejection mode slit 144 and make the disc elevator 22 stay at a higher position when the pin 22b comes to the position of Figure 12. Due to this, it is possible to make higher the insertion/ejection opening 4 for a CD.

25 And the above-mentioned embodiment has assumed that the number of trays forming the disc storing portion is six, but it may be less or more than six. Furthermore, this embodiment uses trays shown in Figures 3 and 4, but may use a pair of carrying pieces  
30 obtained by cutting out portions shown by the alternate long and two short dashes lines in the figure, leaving only both side portions carrying the outer circumferential portion of a CD and removing the middle

part of the aluminum plate 2a.

#### INDUSTRIAL APPLICABILITY

The above-mentioned embodiment is a disc player for reproducing a sound which a disc recording and/or reproducing apparatus of the present invention is applied to, but the present invention is not limited to this but may be applied to an apparatus for recording a sound, an apparatus for recording and reproducing a sound, or an apparatus for recording and/or reproducing not only a sound but also an image. And the above-mentioned embodiment has been described on the assumption that the direction in which trays are stacked one over another is the vertical direction, but the direction in which trays are stacked one over another may be the horizontal direction. This embodiment uses a disc of 12 cm in size, but can be also applied to a disc having another size such as 8 cm or the like.

## CLAIMS

1. A disc recording and/or reproducing apparatus comprising:
- a catching means for catching a disc, said
- 5 catching means being provided in a disc mounting means for mounting the disc;
- a releasing means for releasing a caught condition of the disc caught by said catching means after setting the disc to a turntable while keeping a
- 10 direction of the disc surface; and
- a separating means for separating said disc mounting means from the disc in a condition that the disc is set on the turntable.
- 15 2. A disc recording and/or reproducing apparatus as claimed in claim 1, wherein said catching means comprises a plate spring which presses a face of a circumferential portion of the disc.
- 20 3. A disc recording and/or reproducing apparatus as claimed in claim 1, wherein said catching means comprises at least two member which are apart from each other.
- 25 4. A disc recording and/or reproducing apparatus as claimed in claim 1, wherein said catching means comprises a first plate spring which presses a face of a circumferential portion of the disc and a second plate spring which presses another face of the
- 30 circumferential portion of the disc.



# ABSTRACT

In an on-vehicle disc player having a disc elevator (22) for making a plurality of trays (2) each having a CD placed on it stacked one over another in the vertical direction move in the stacking direction, there is provided plate springs (2e) for pressing an inserted CD at both sides of the tray (2). Further, there is provided separating cams (82) for forming spaces at both side of the tray (2) having a CD to be reproduced, by the movement in the fore-and-aft direction. Holding means for holding and rotating the CD are inserted to the spaces formed by the separating cams (82) to hold the CD. Thereafter, by pushing down the plate springs (2e) which has pushed and caught the CD in the tray (2) by means of peripheral portions (82x) of lower faces of upper stage entering portions (82j) of the separating cams (82), the CD is released and the tray (2) is pushed down to be separated from the CD. This enables the reproduction at the same position as the supporting position, and thereby it becomes possible to make the apparatus small in size.

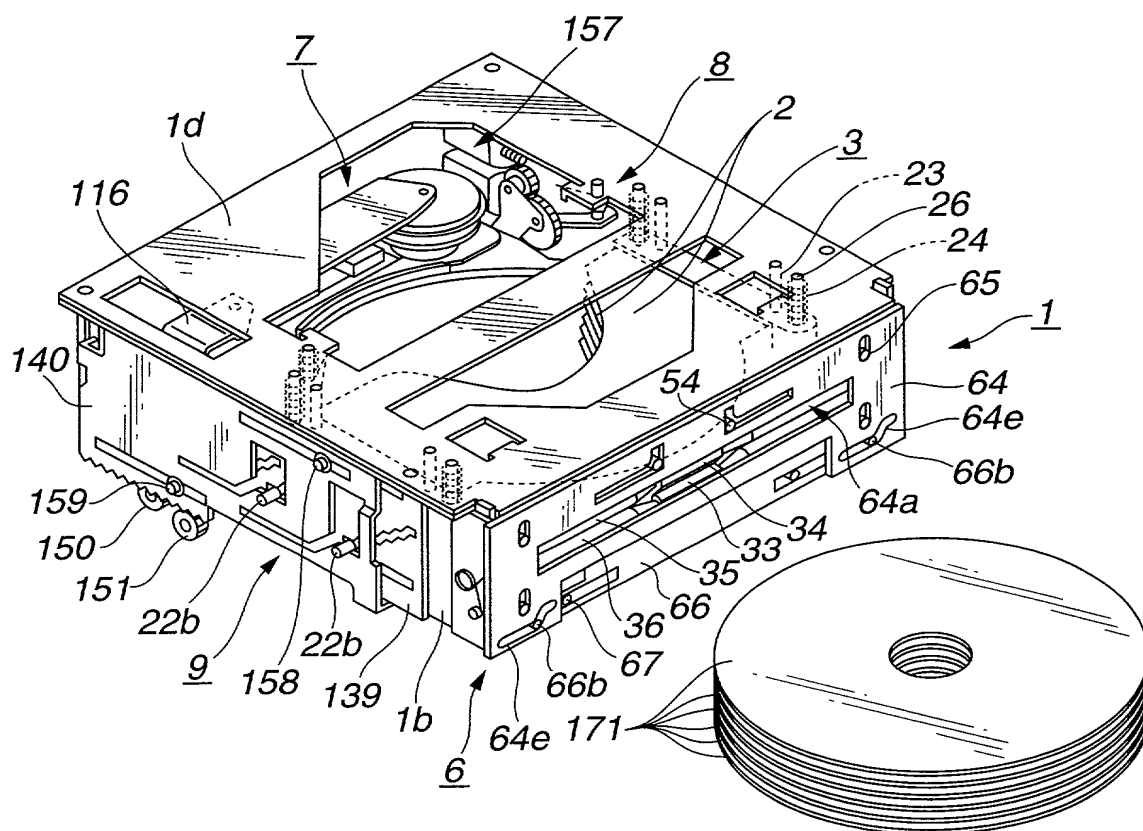
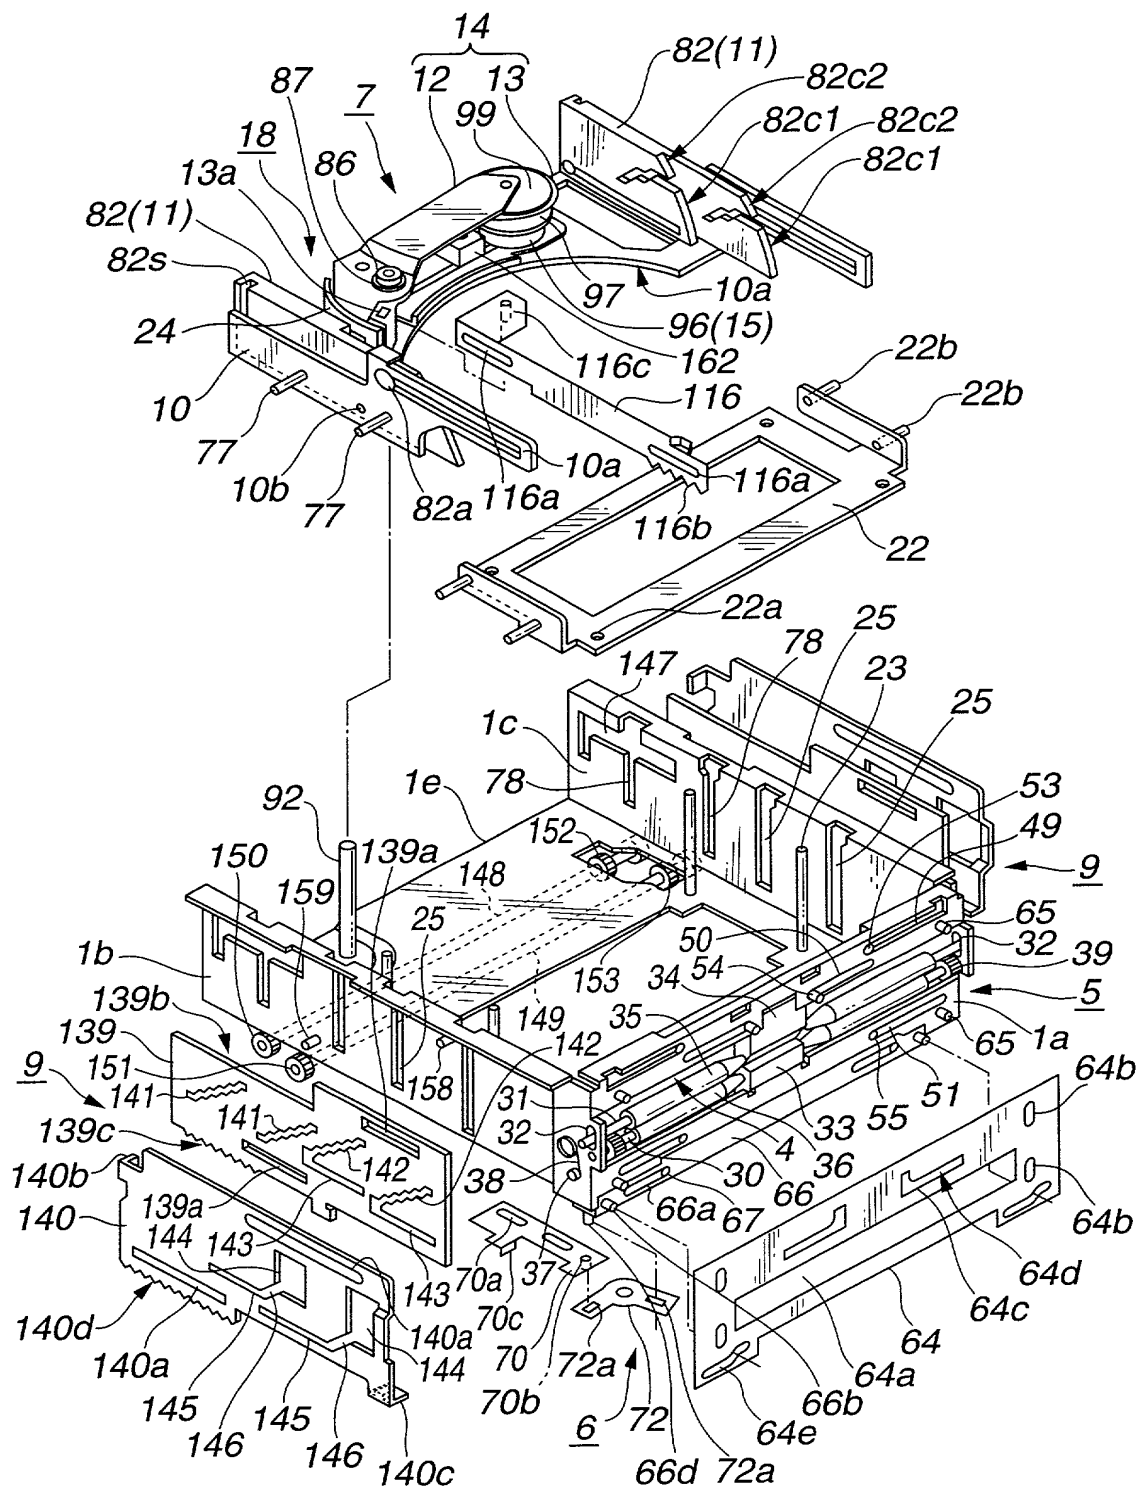
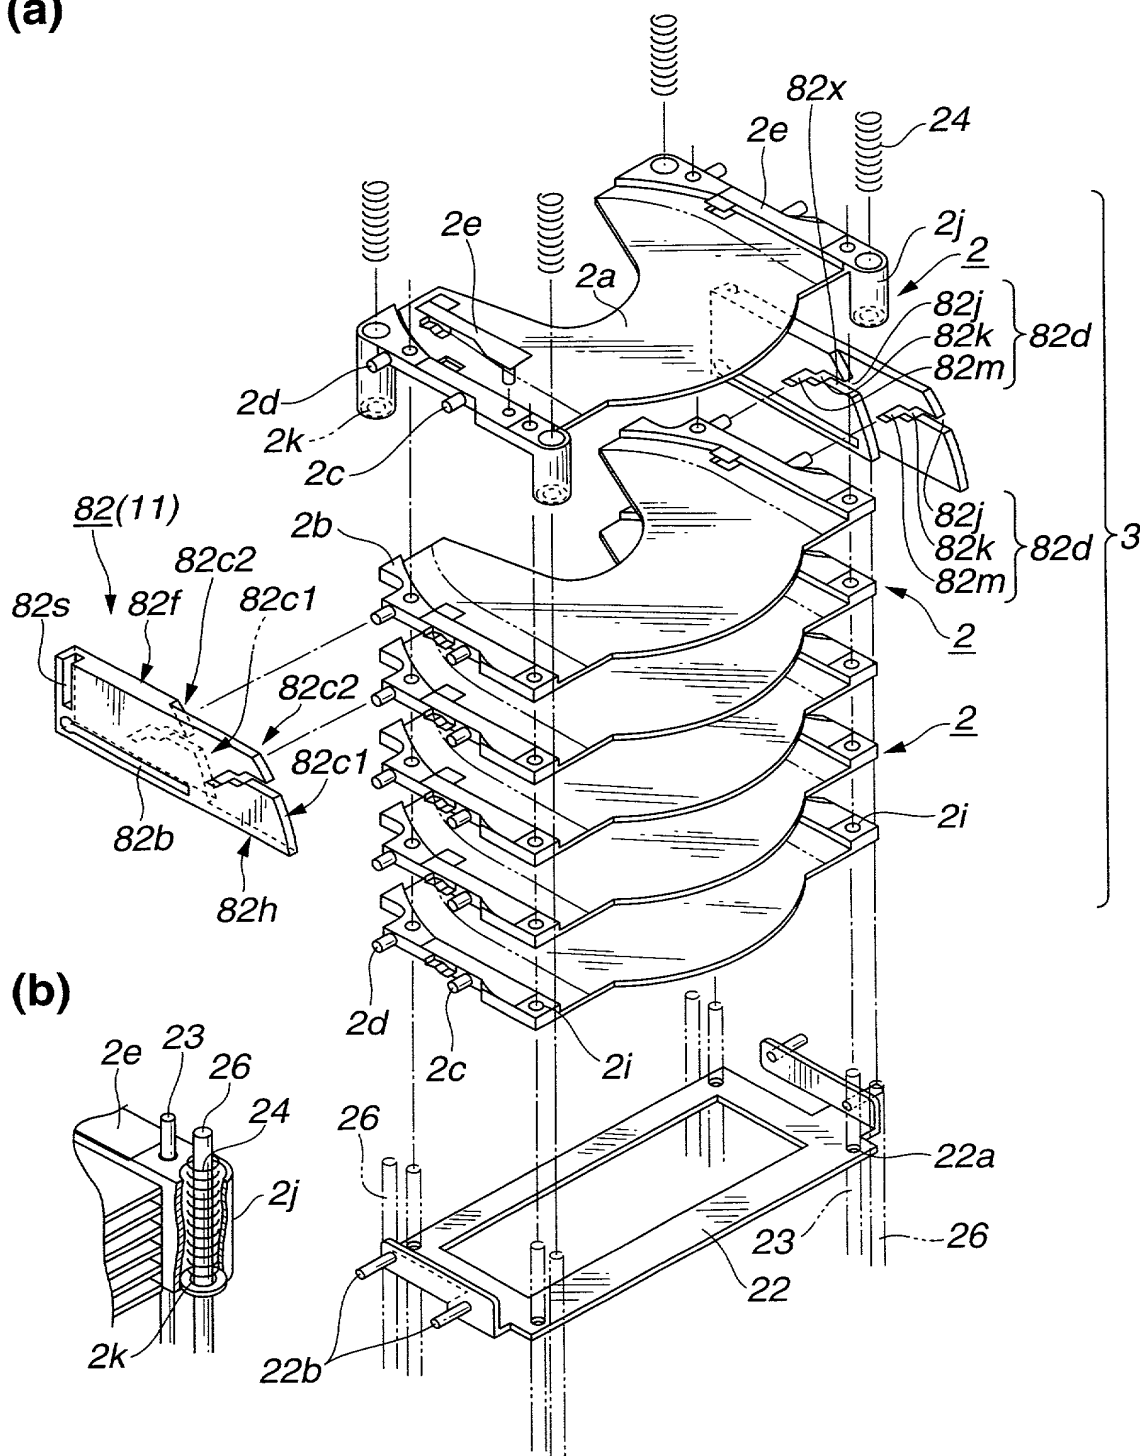




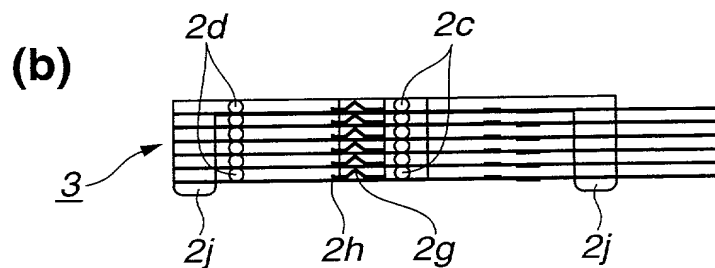
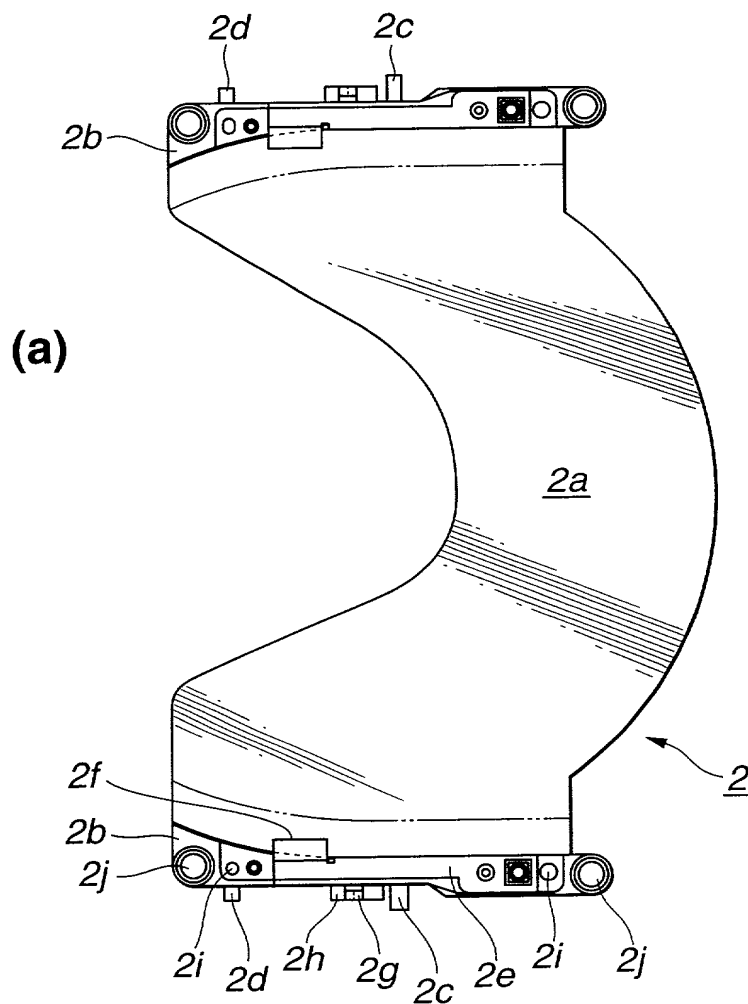
Fig.2



**Fig.3****(a)****(b)**



208727US6A

**Fig.4**

This perspective view shows the front portion of the device 10. The main body consists of a base plate 1e and side rails 1a and 1b. A central assembly includes a series of gears 56, 57, and 58 mounted on shafts 52 and 53. A drive mechanism at the bottom left features a motor or actuator 140 connected to a gear train 139, which drives a rack and pinion 140. Various other components are labeled, including 1c, 22b, 30, 31, 33, 33a, 34, 34a, 35, 36, 48, 54, 55, 59, 60, 61, 62, 72, 73, 78, and 116. The diagram illustrates the mechanical arrangement for moving the front panel 22.

Fig.6

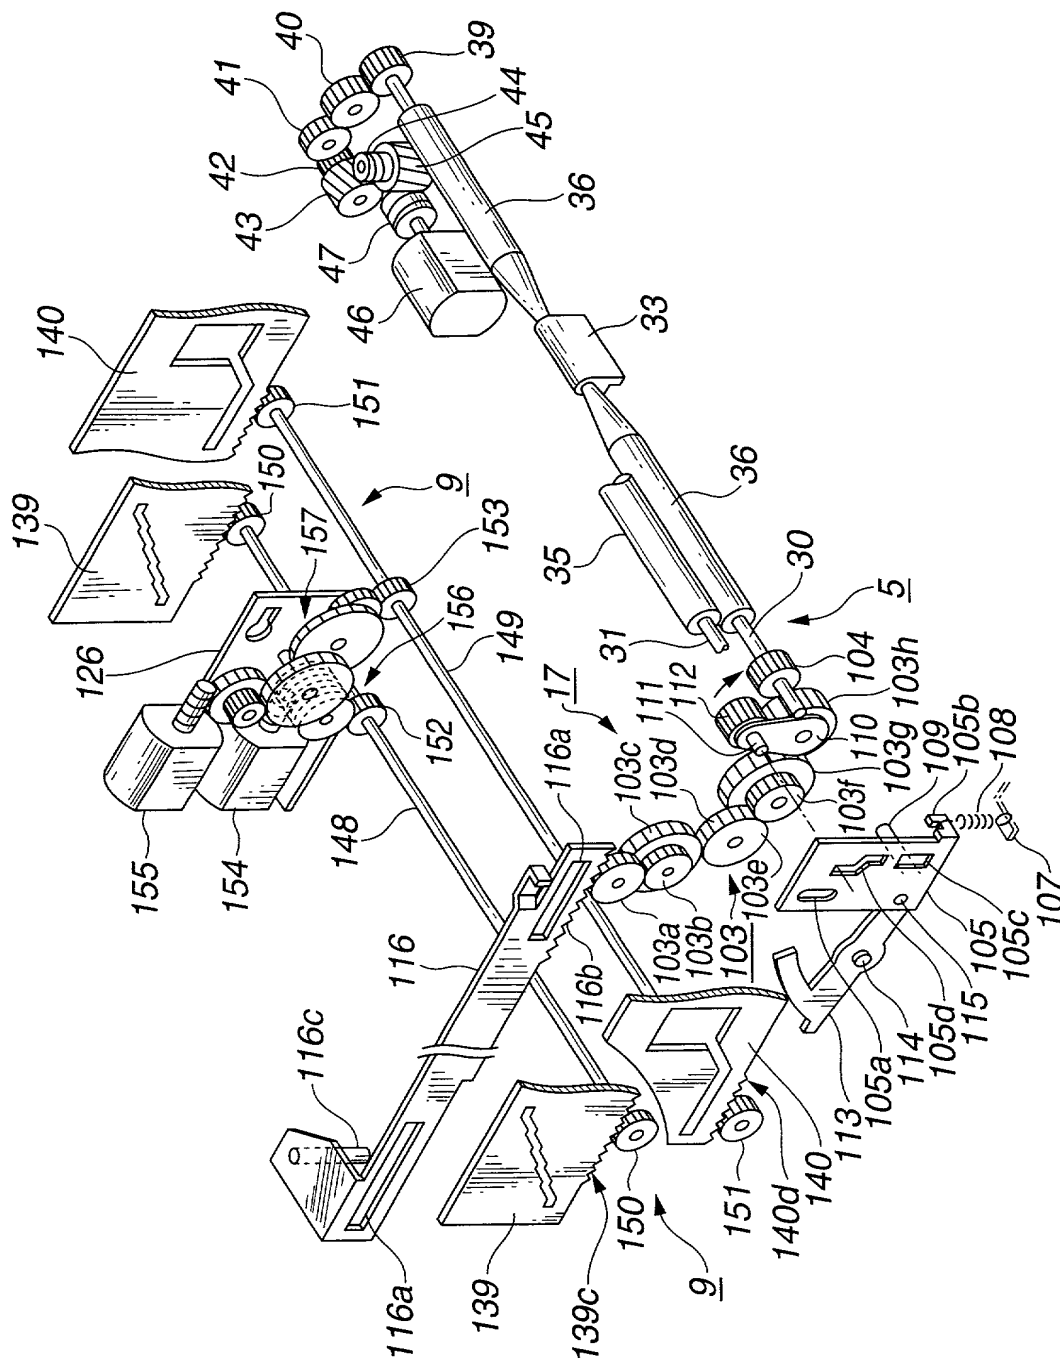


Fig.7

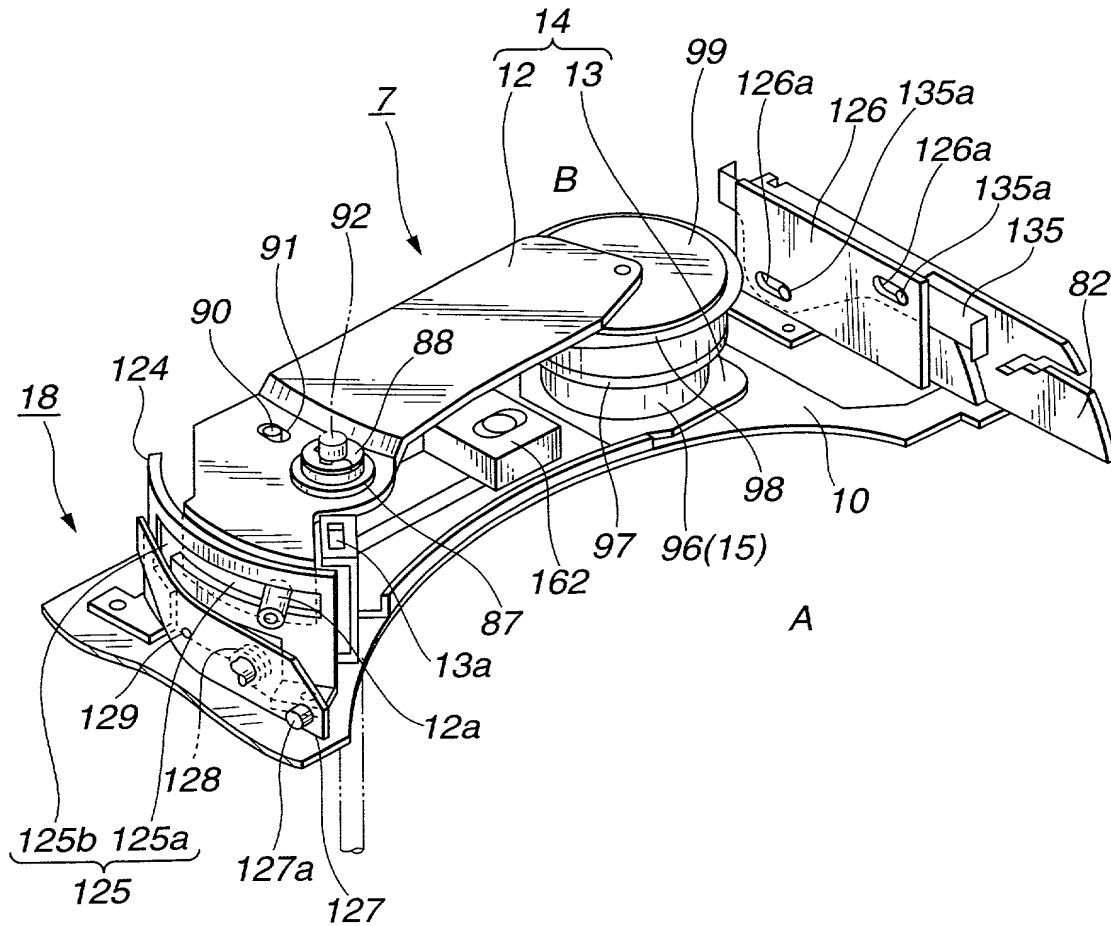






Fig.8

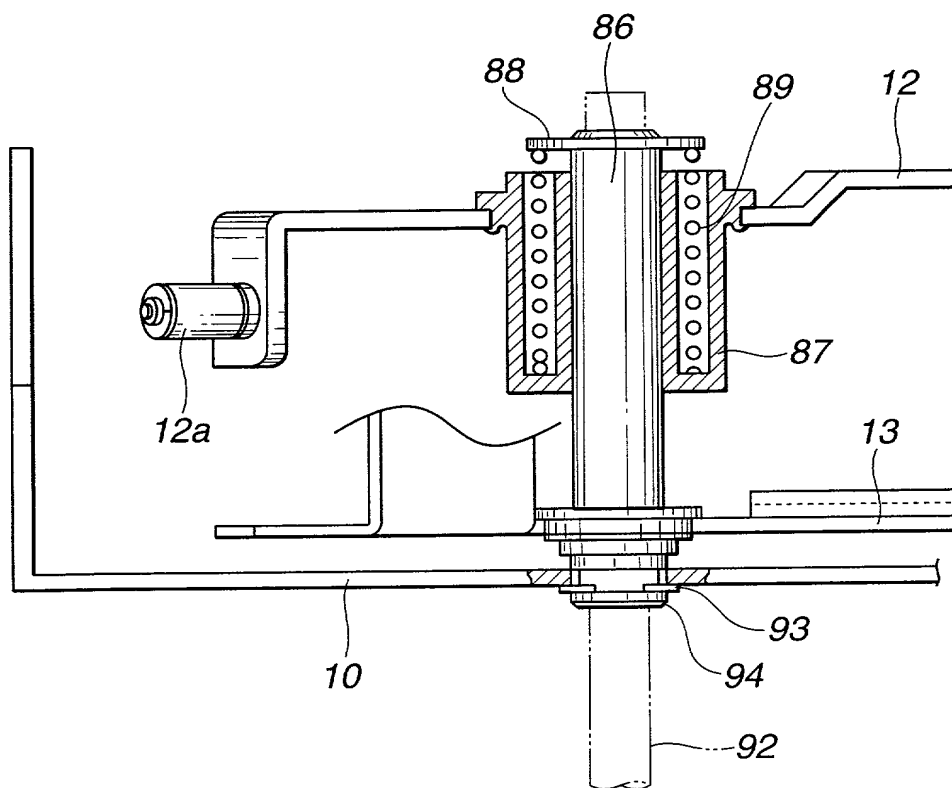
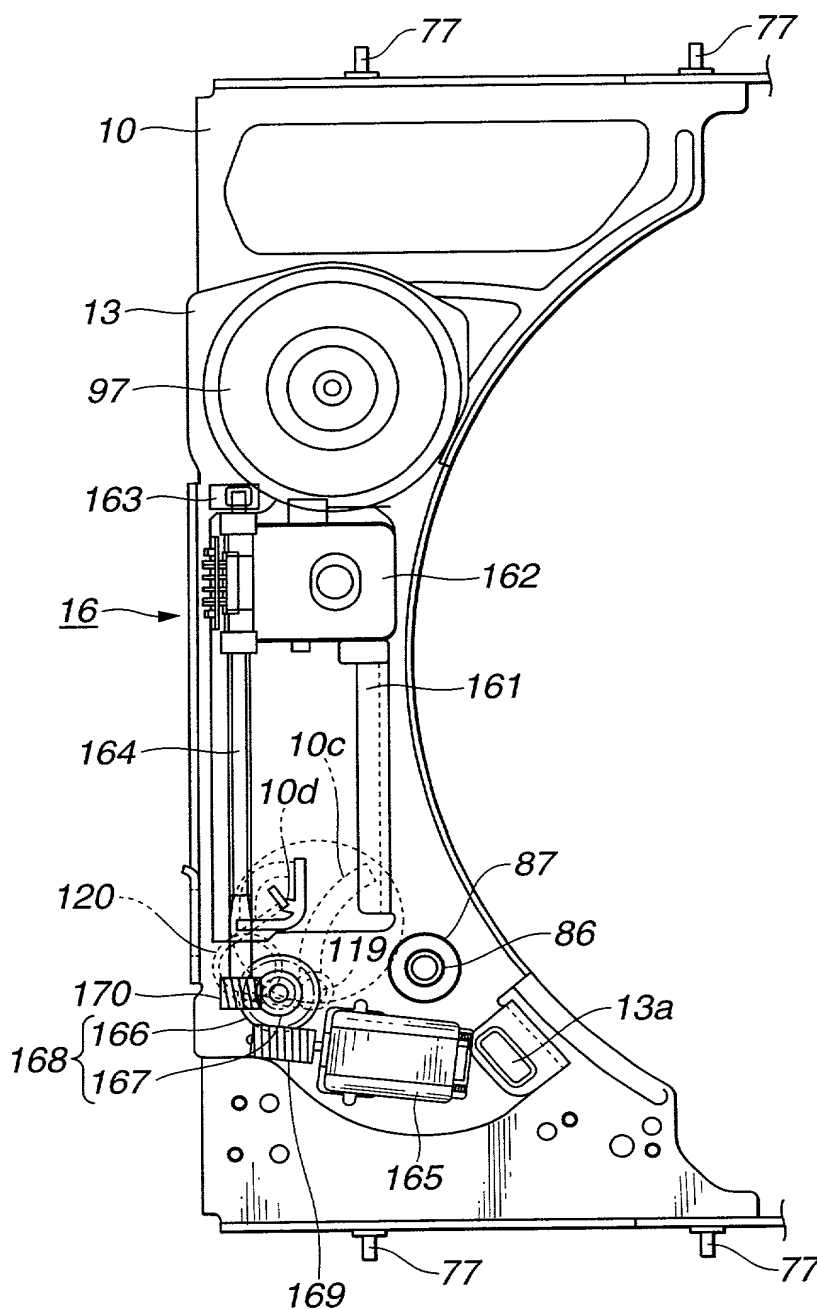
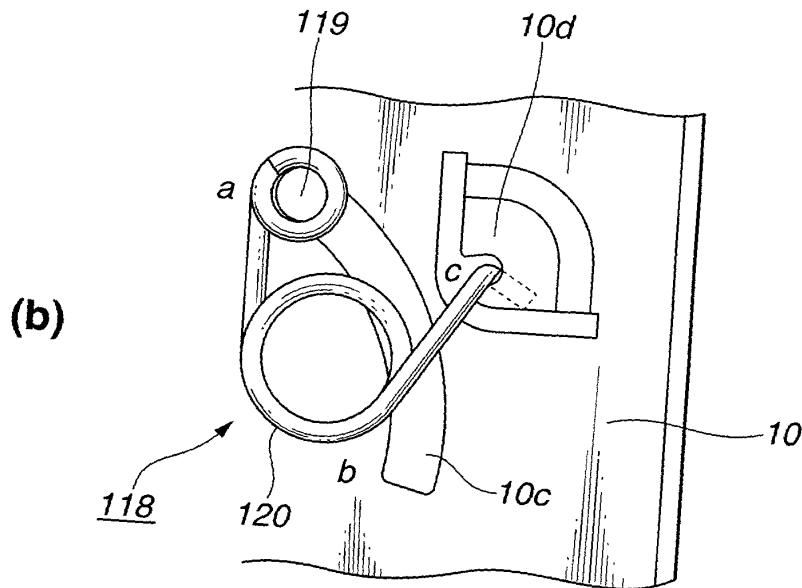
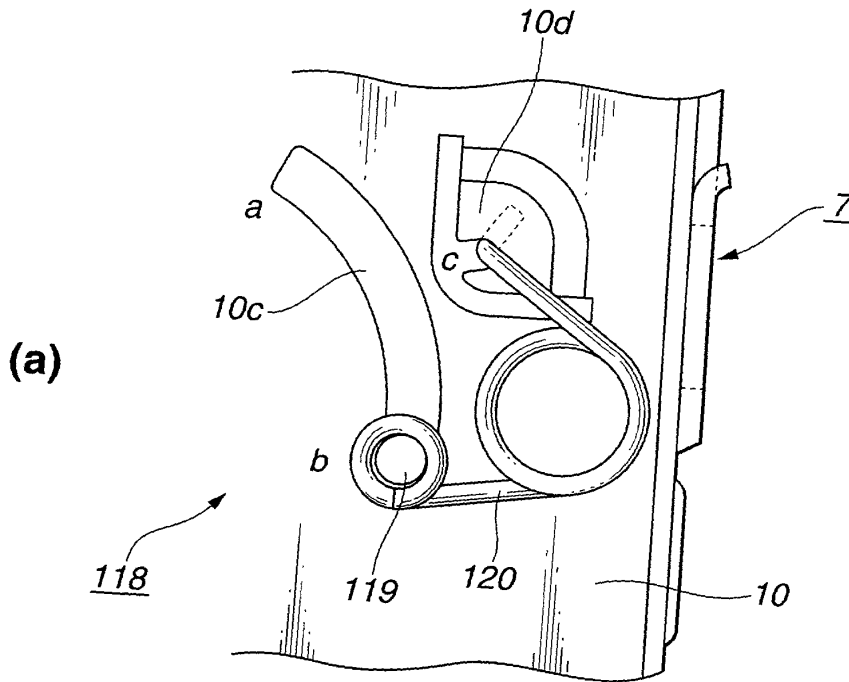


Fig.9



**Fig.10**



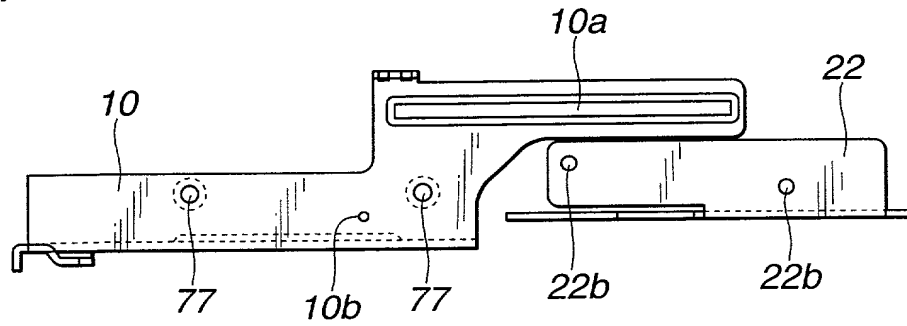
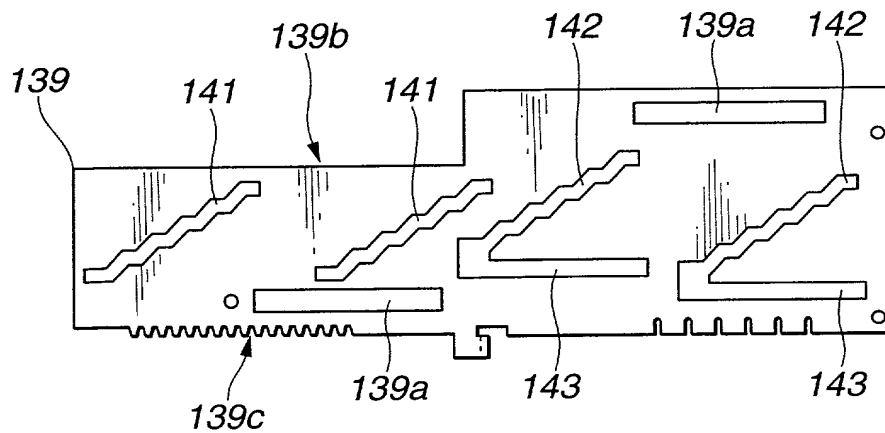
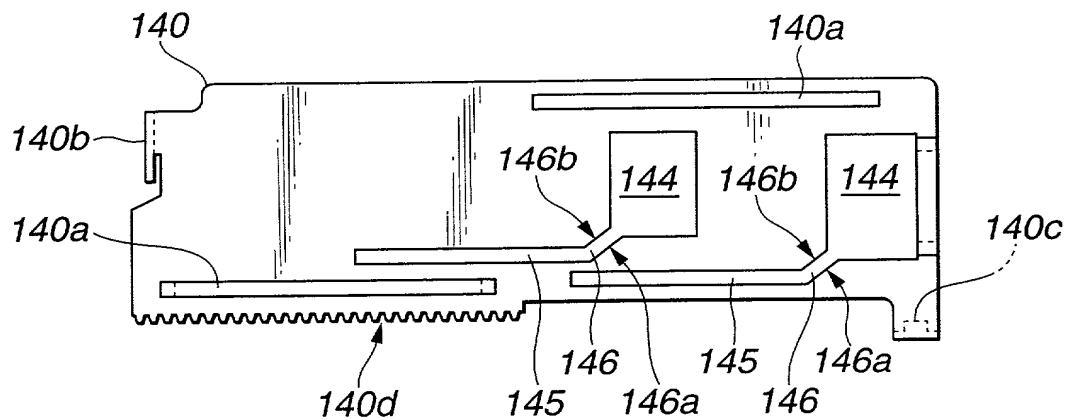
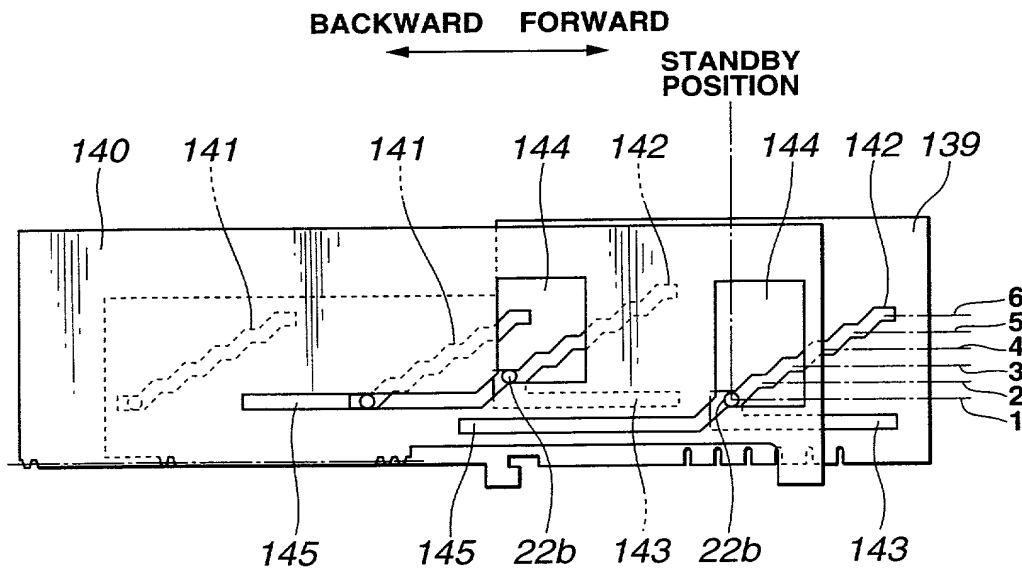
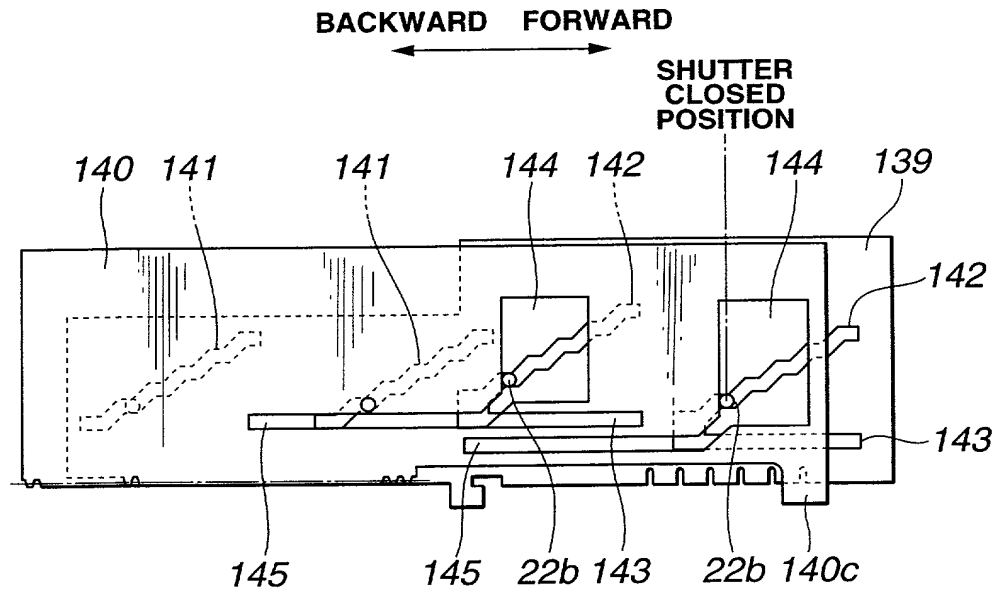
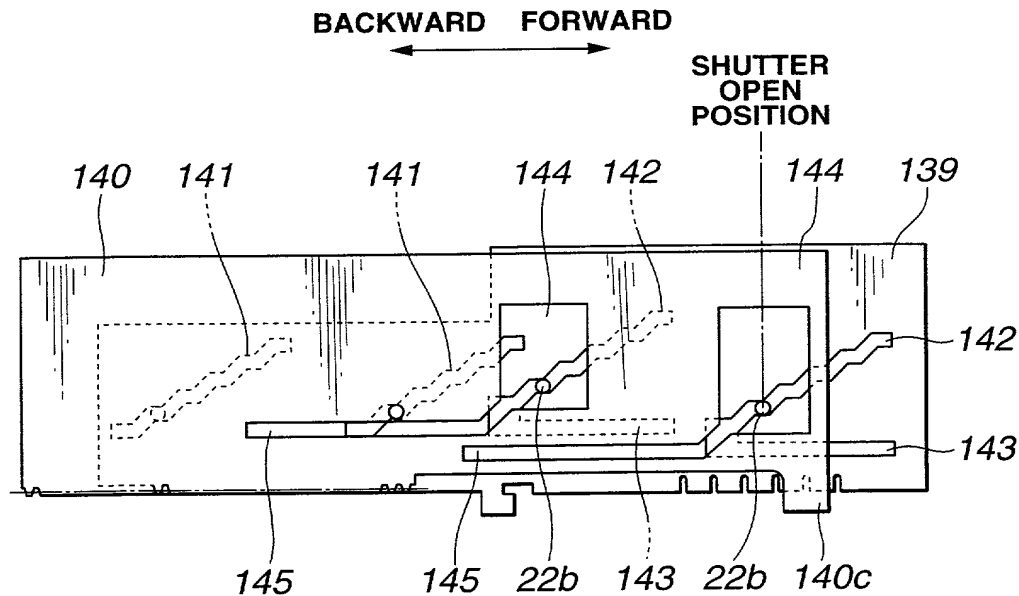
**Fig.11****(a)****(b)****(c)**

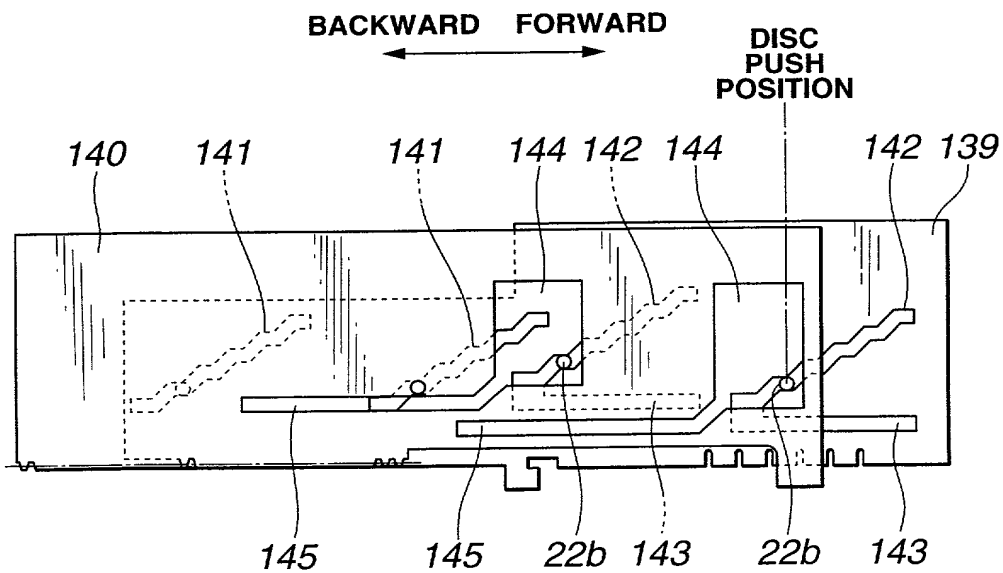


Fig.12



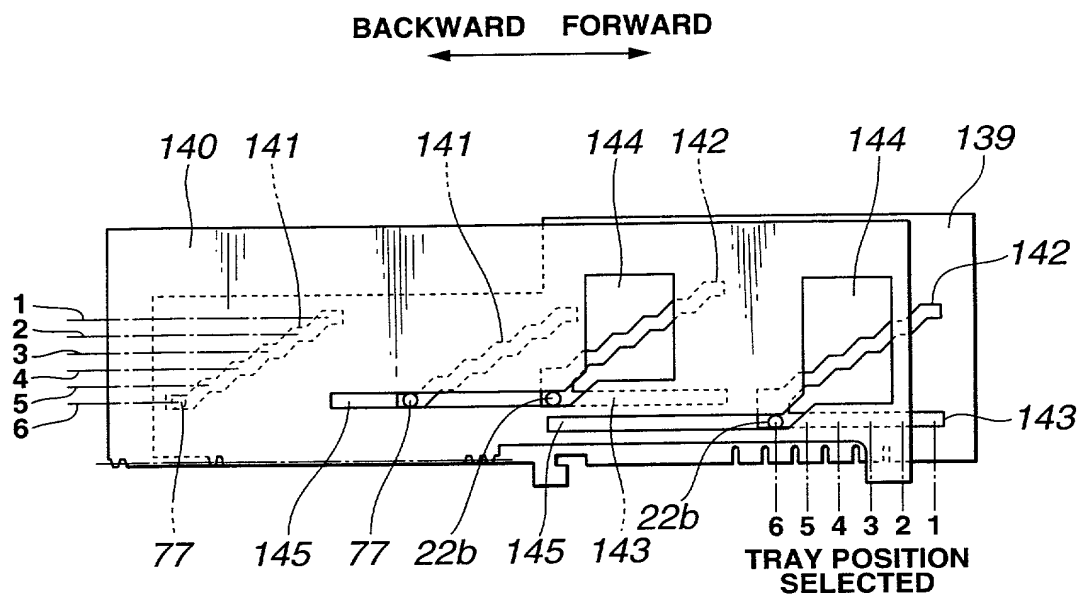
**Fig.13****(a)****(b)**

**Fig.14**

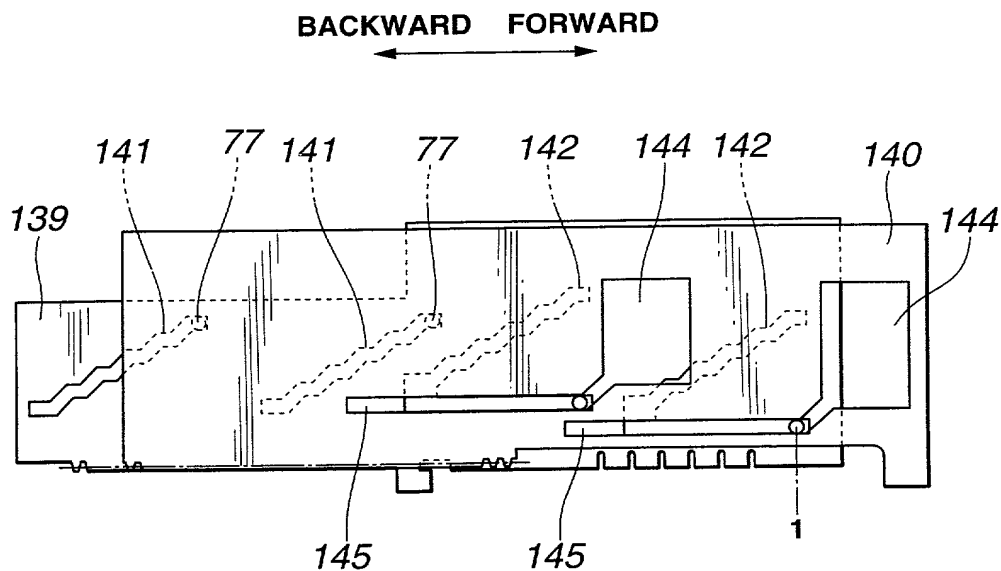


**Fig.15**

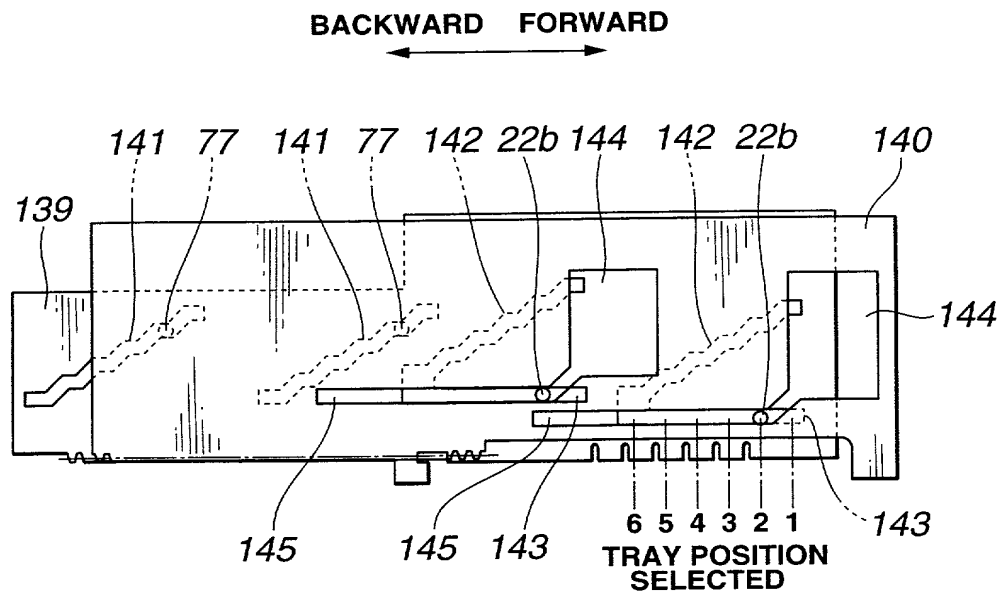
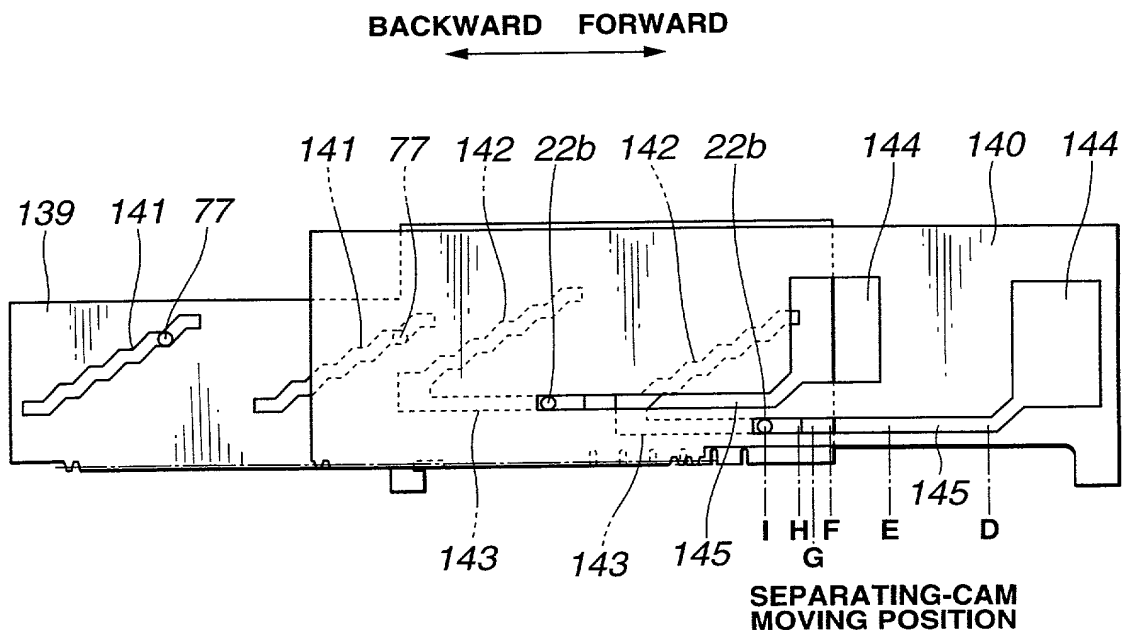
**(a)**

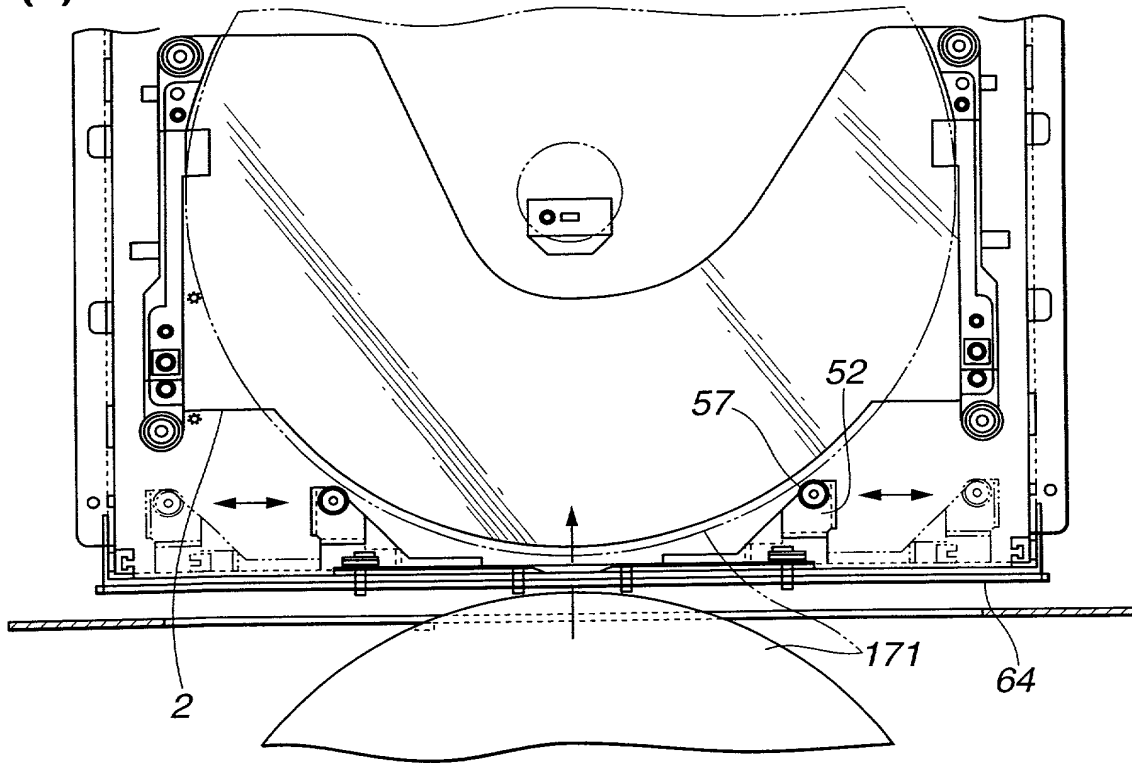
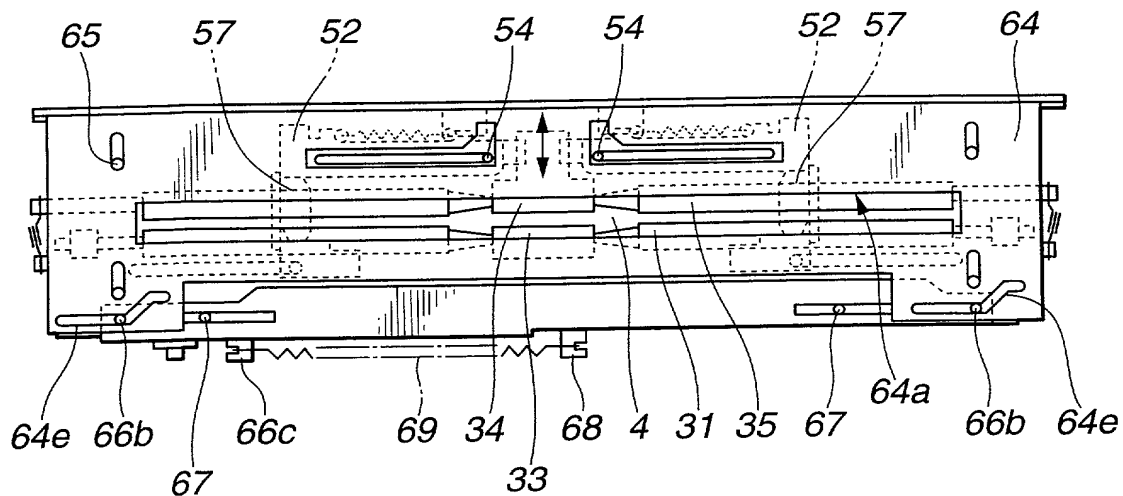


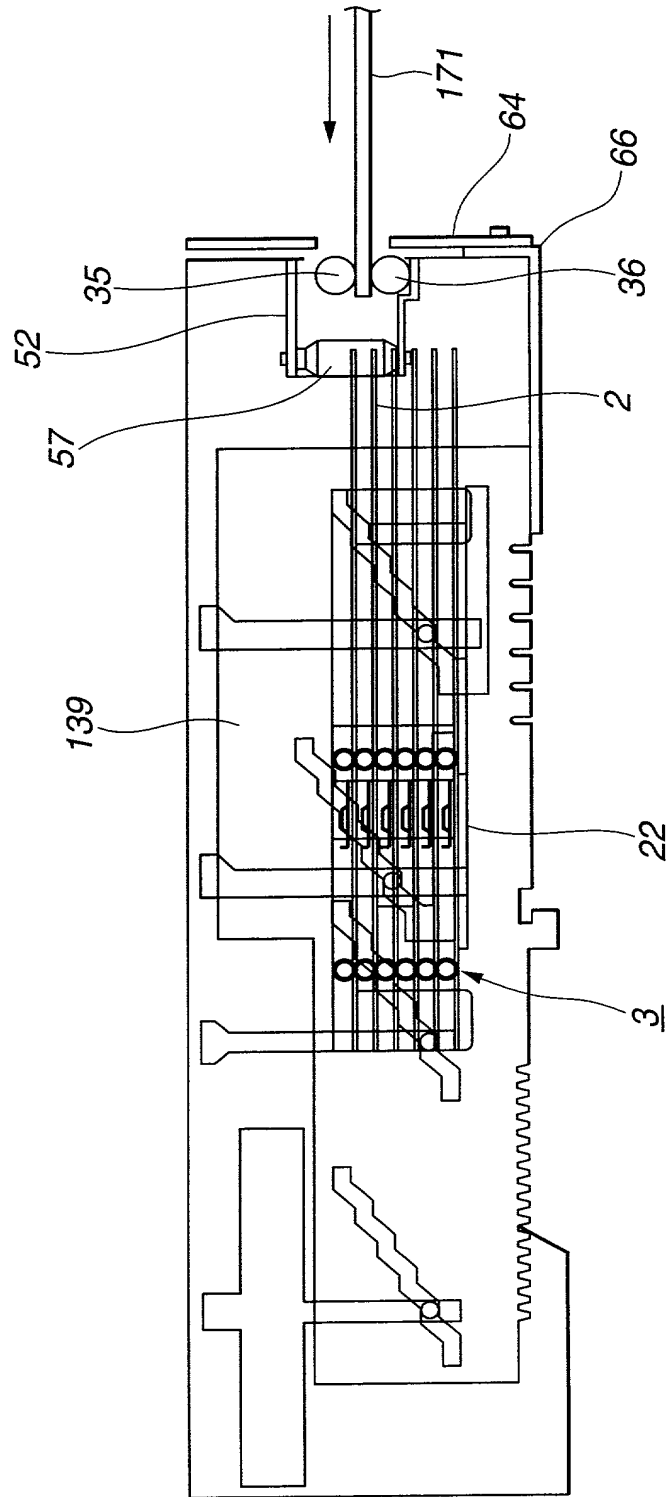
**(b)**





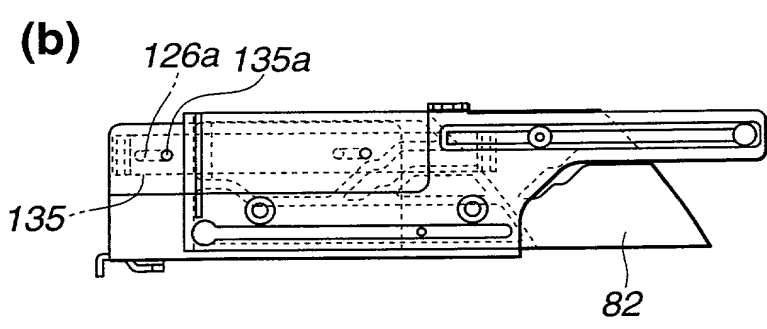
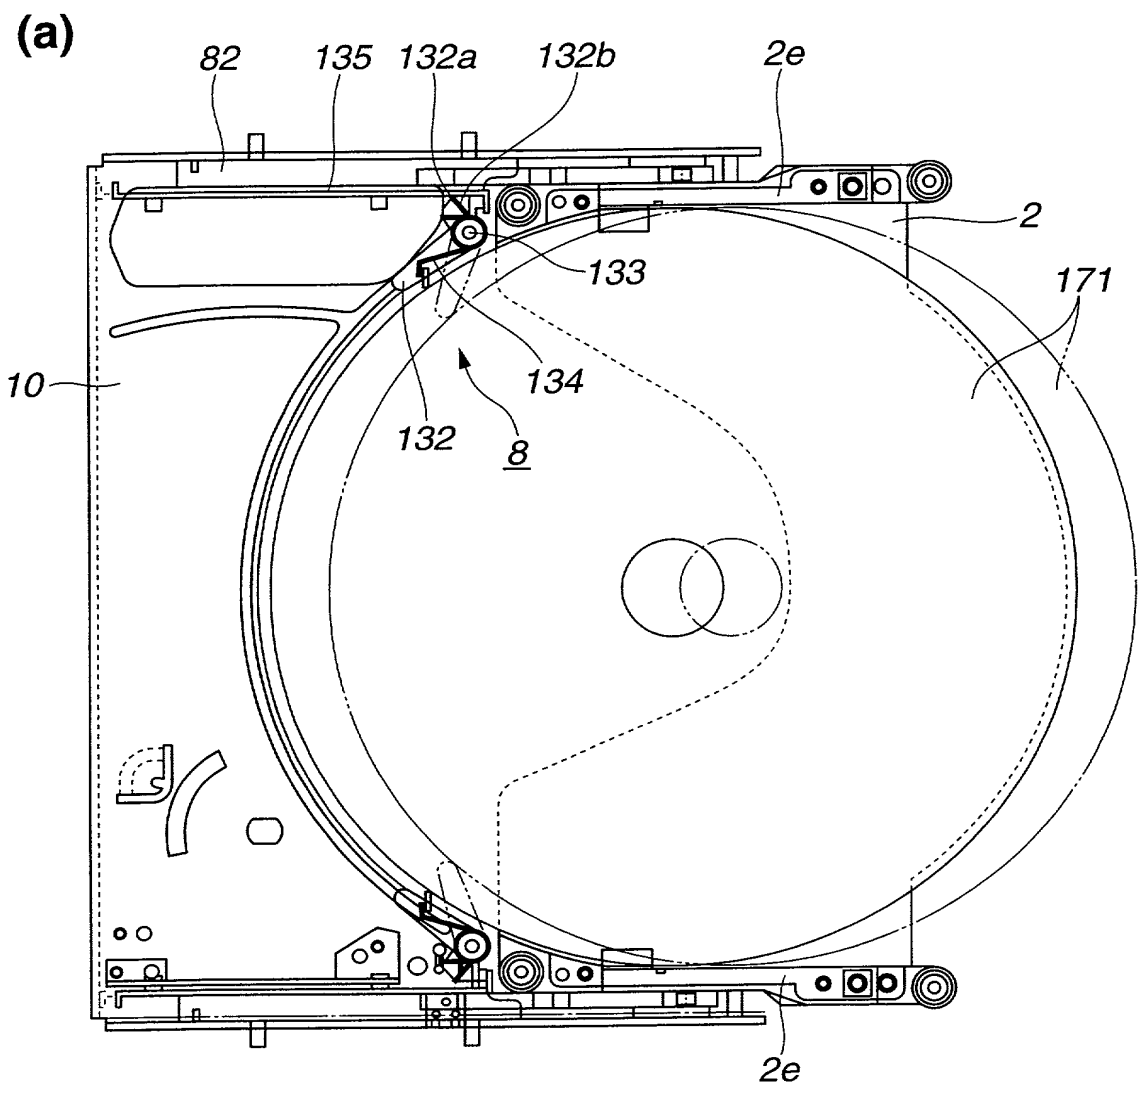
**Fig.16****(a)****(b)**

**Fig.17****(a)****(b)**



**Fig. 18**

Fig.19



# Fig. 20

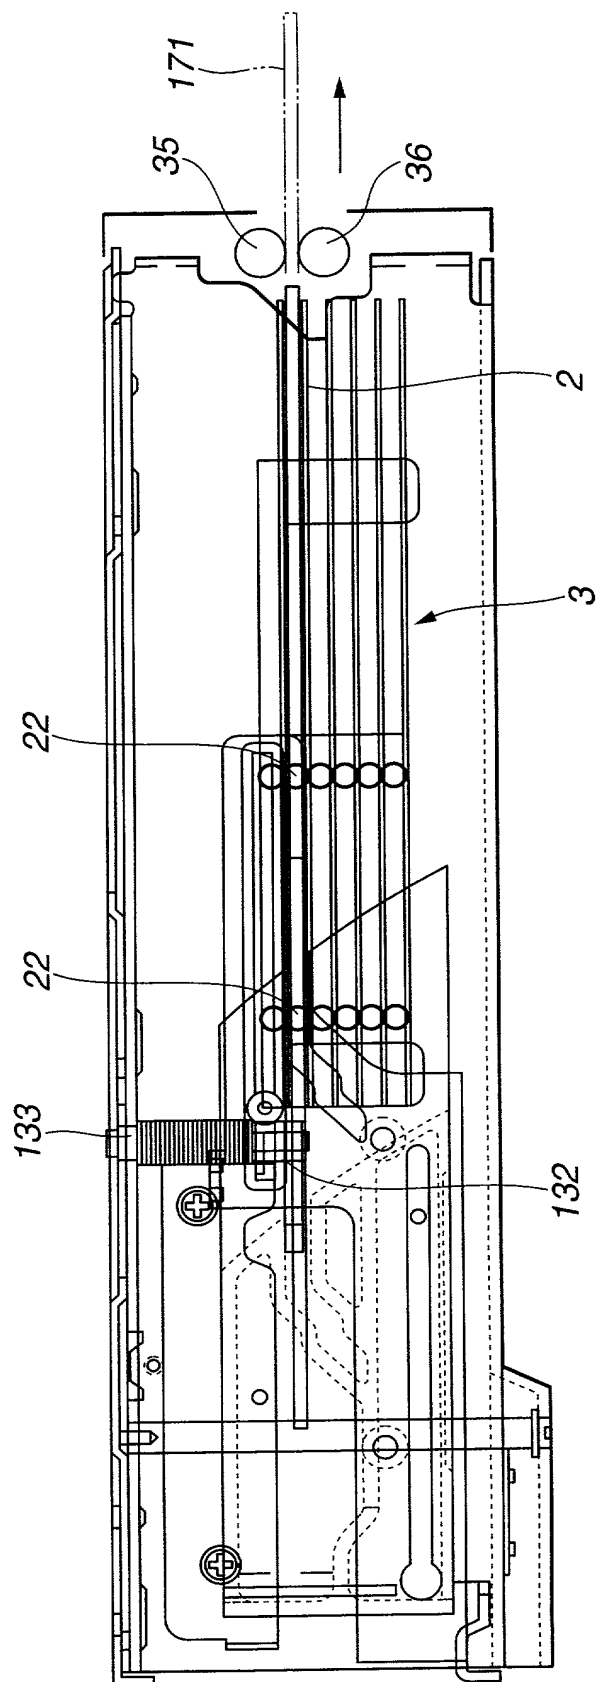




Fig.22

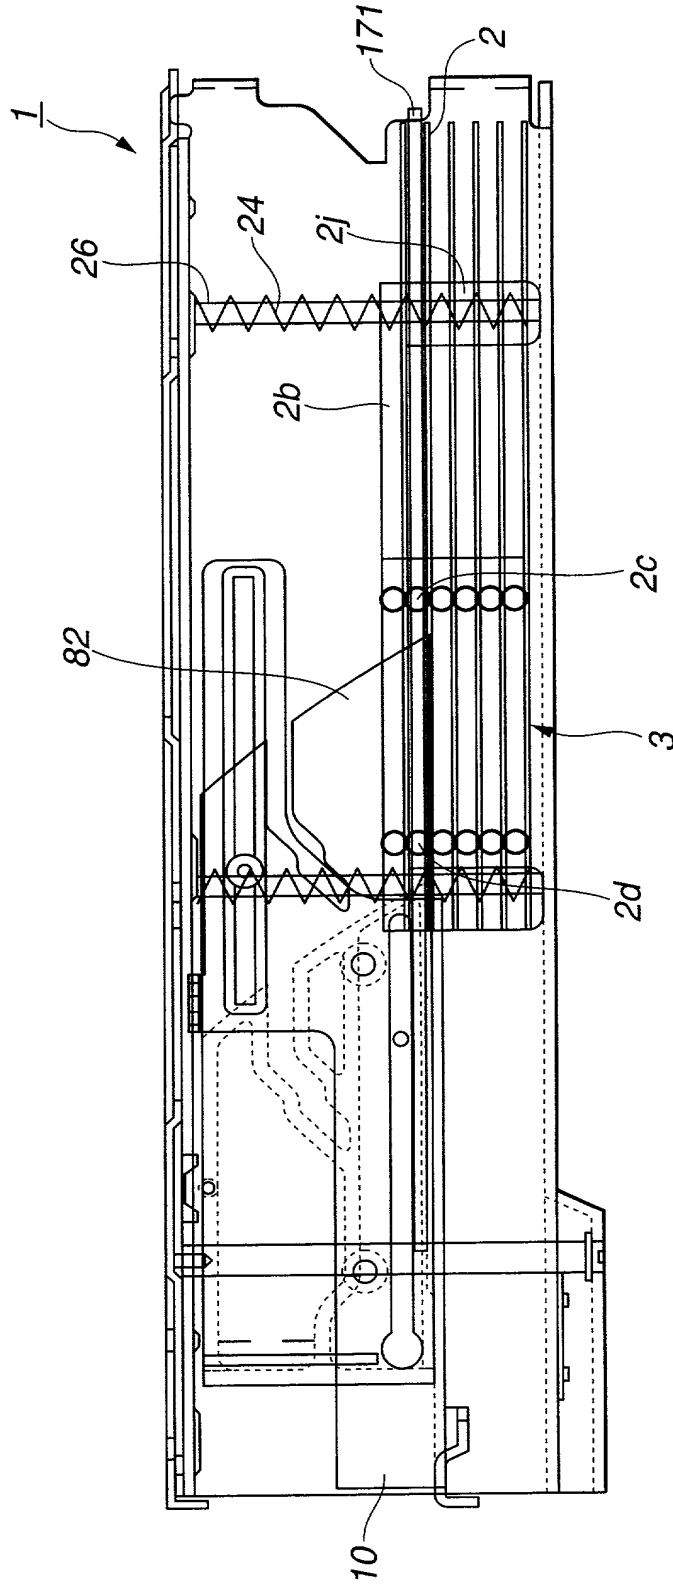


Fig.23

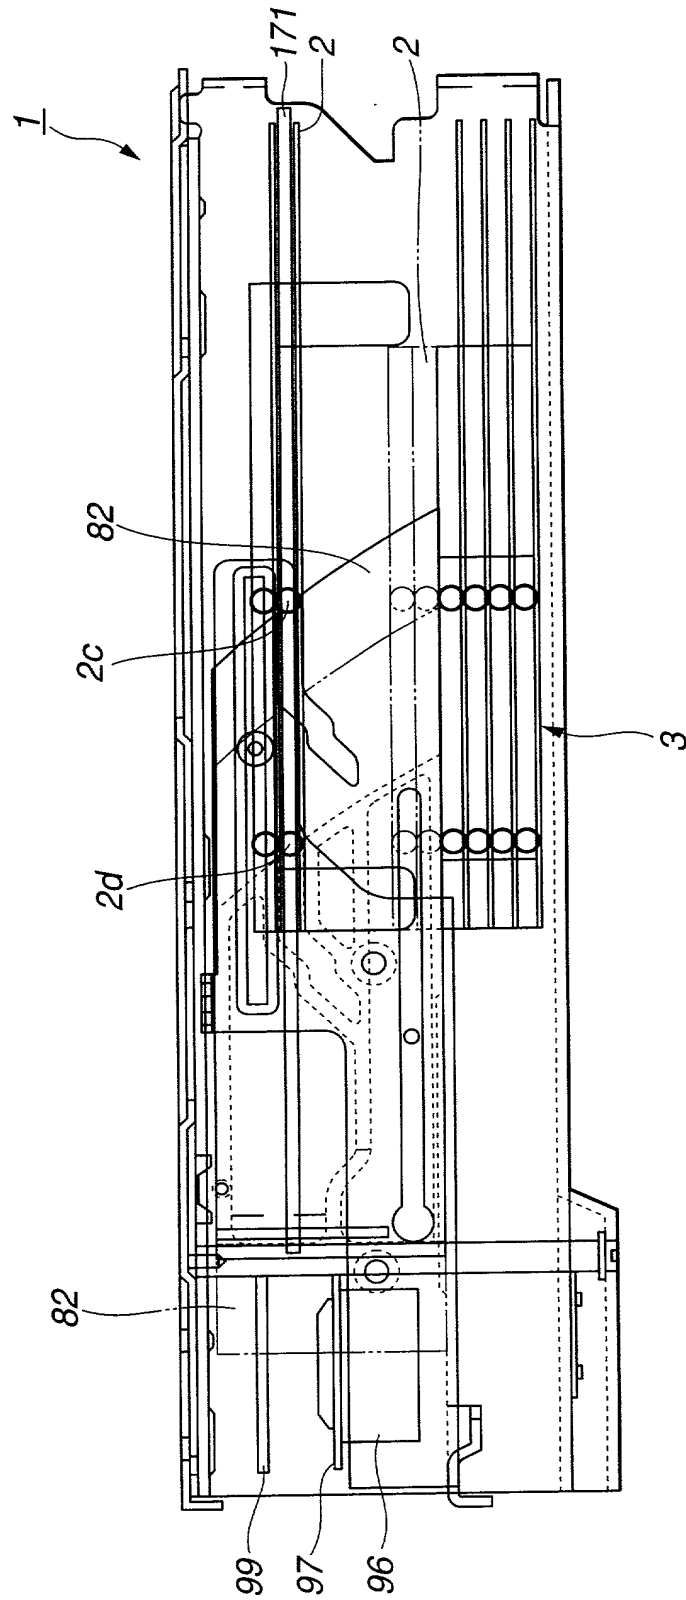






Fig.24

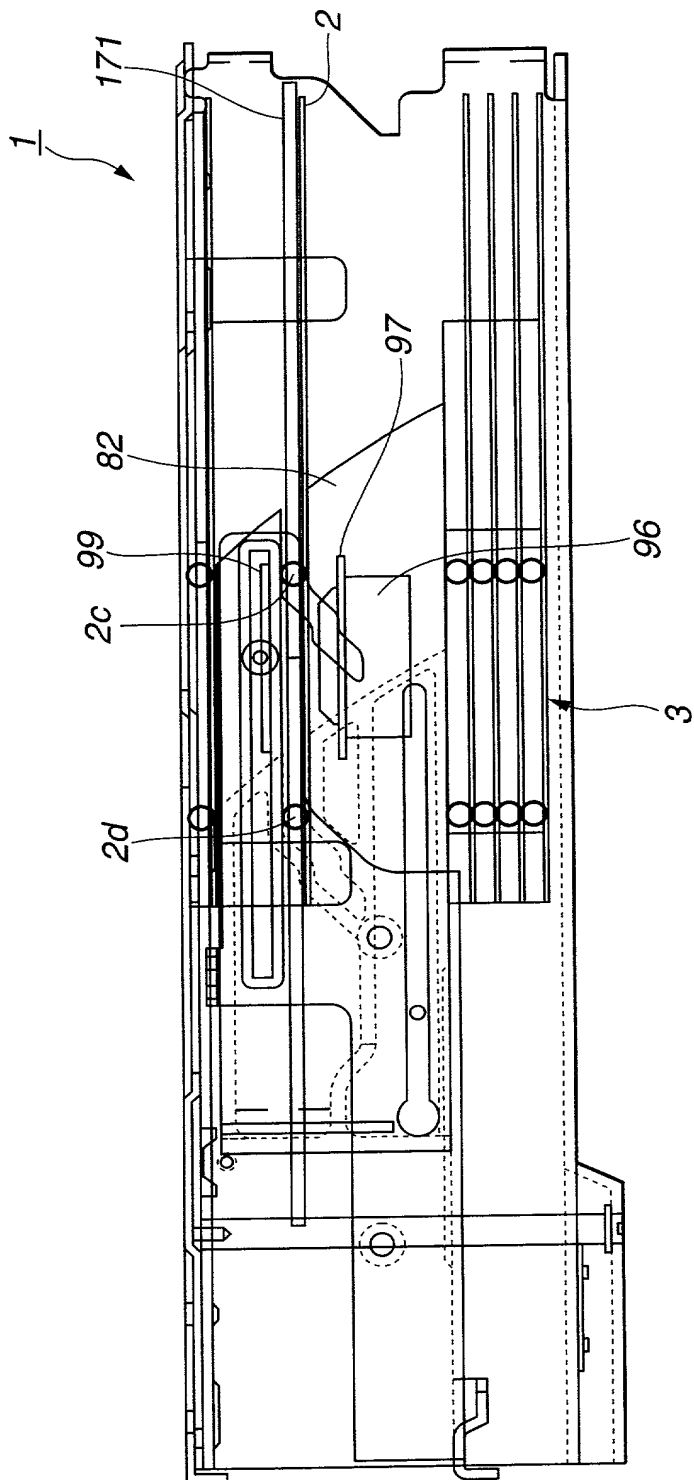
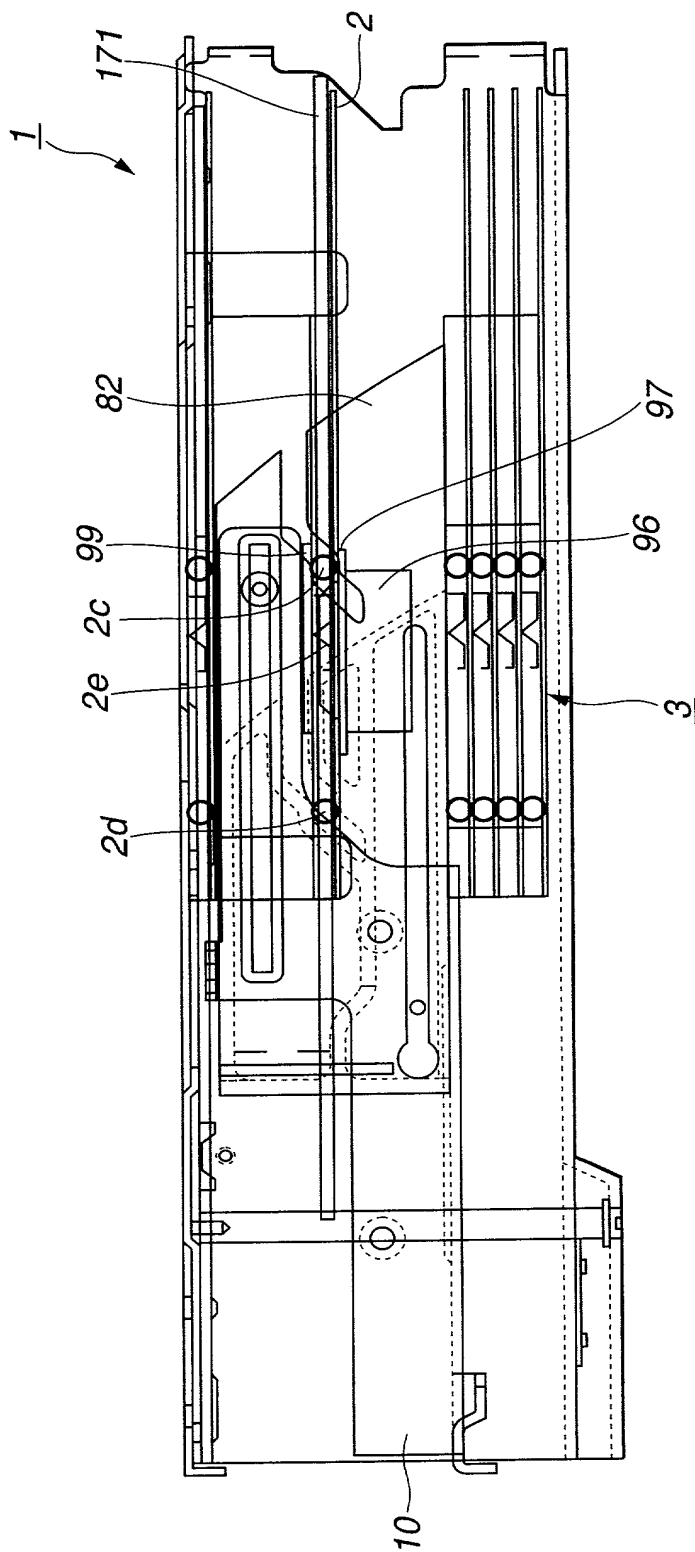
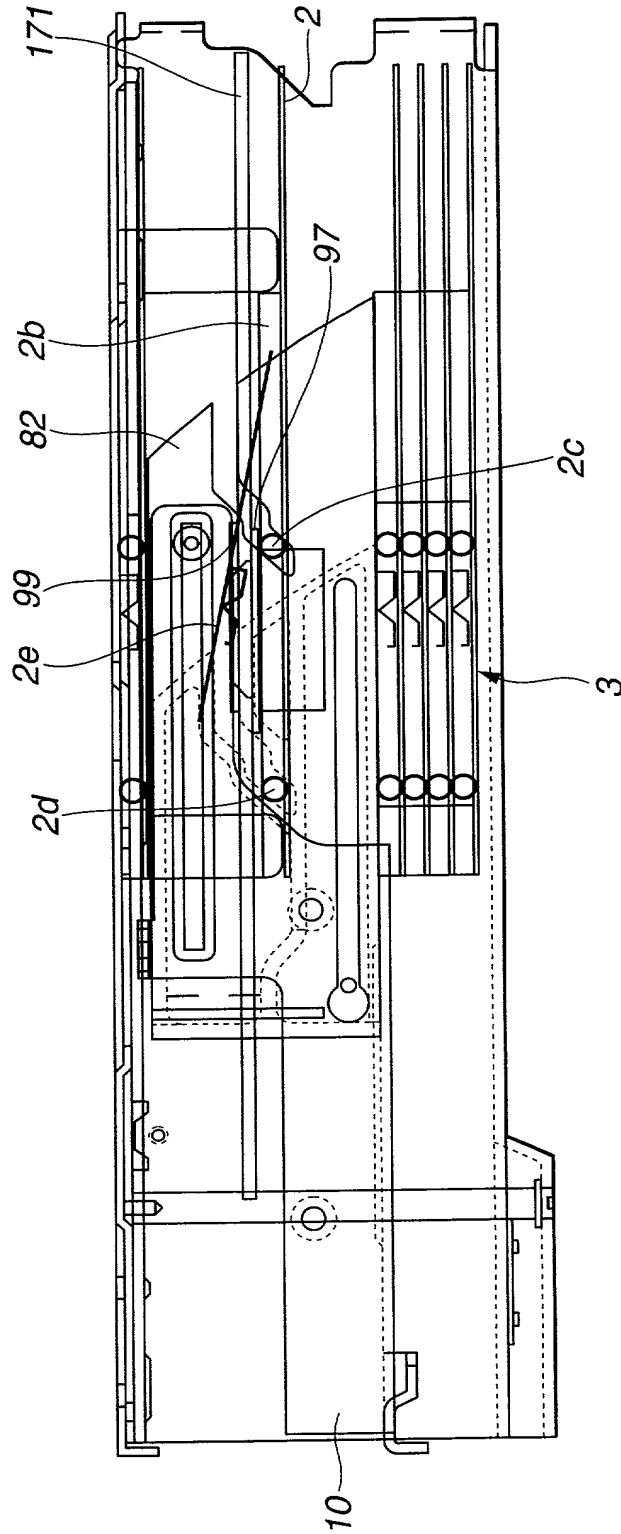


Fig.25



[illegible]

FILED IN 438,688



OBLON ET AL (703) 413-3000

DOCKET #

SHEET

OF

2087274US6PCT

09/831884

Fig.27

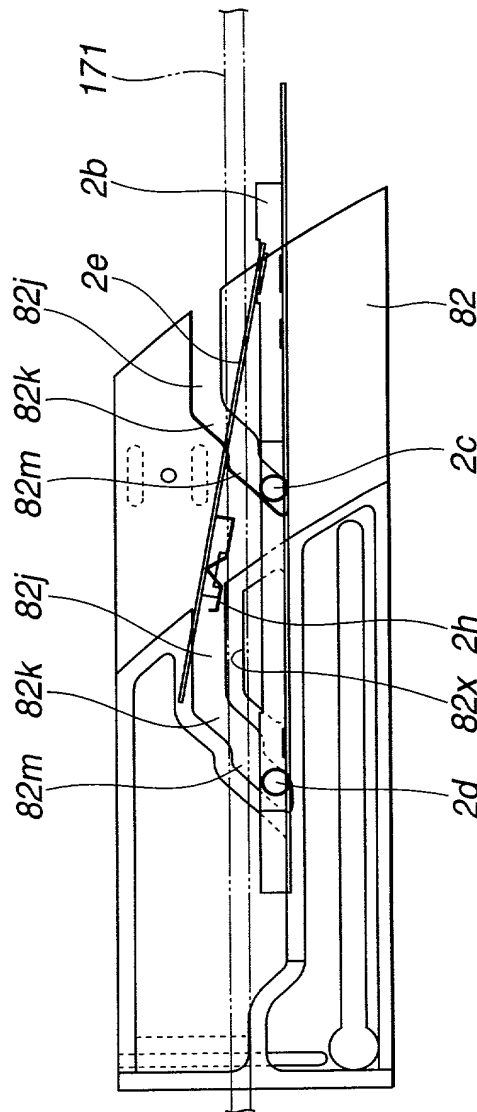
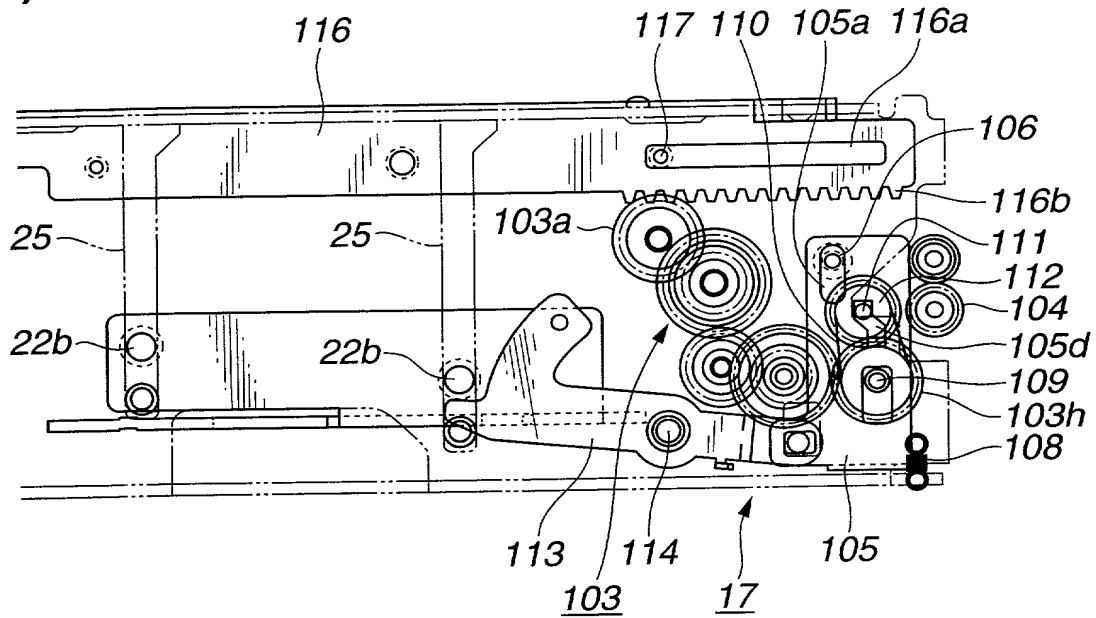
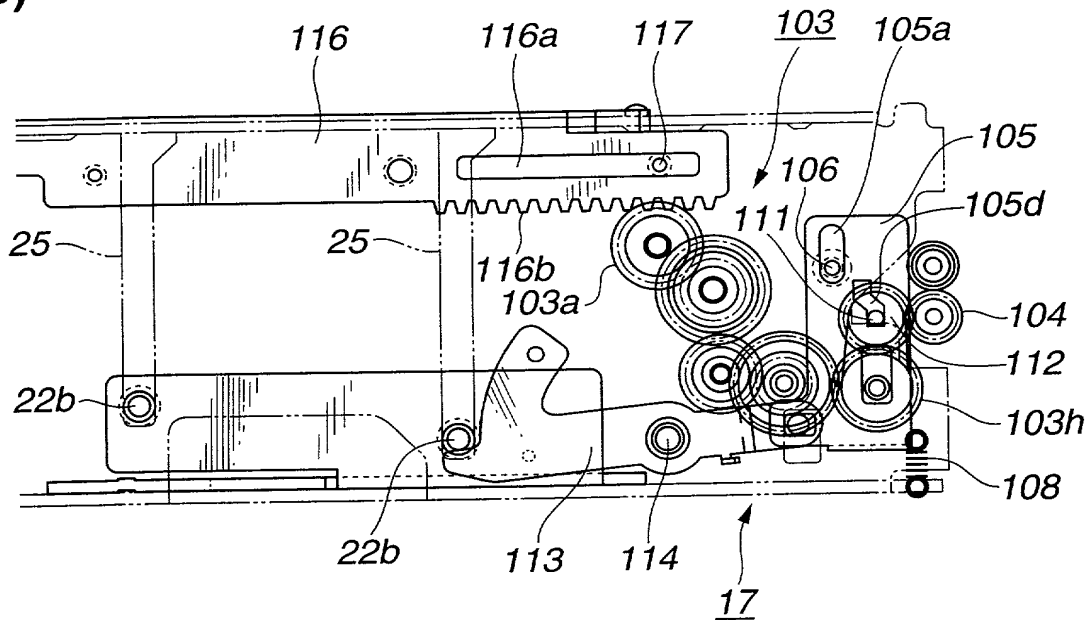


Fig.28

(a)




(b)



FILED 11-18-2011

Fig. 29

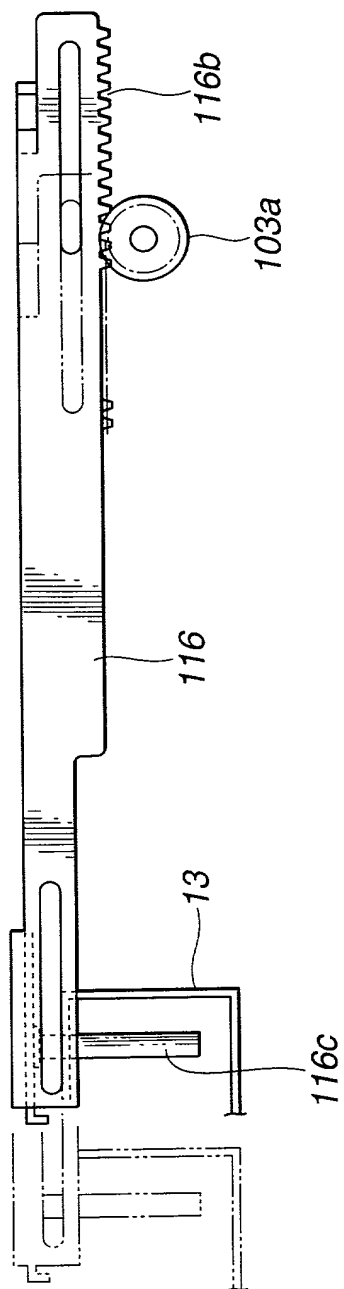

**Fig.30**

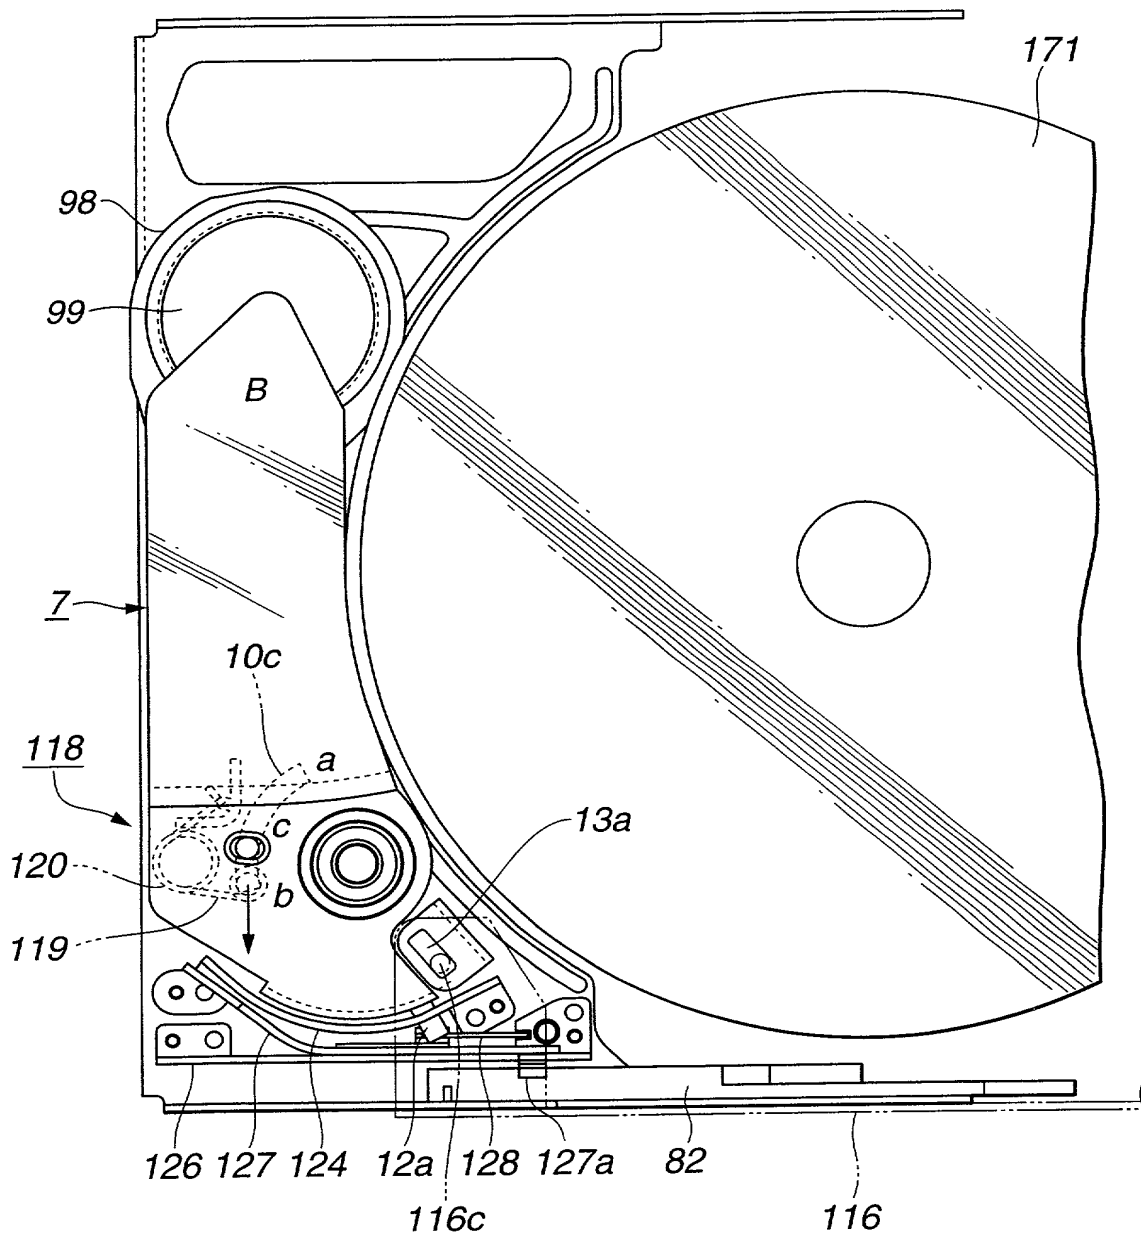
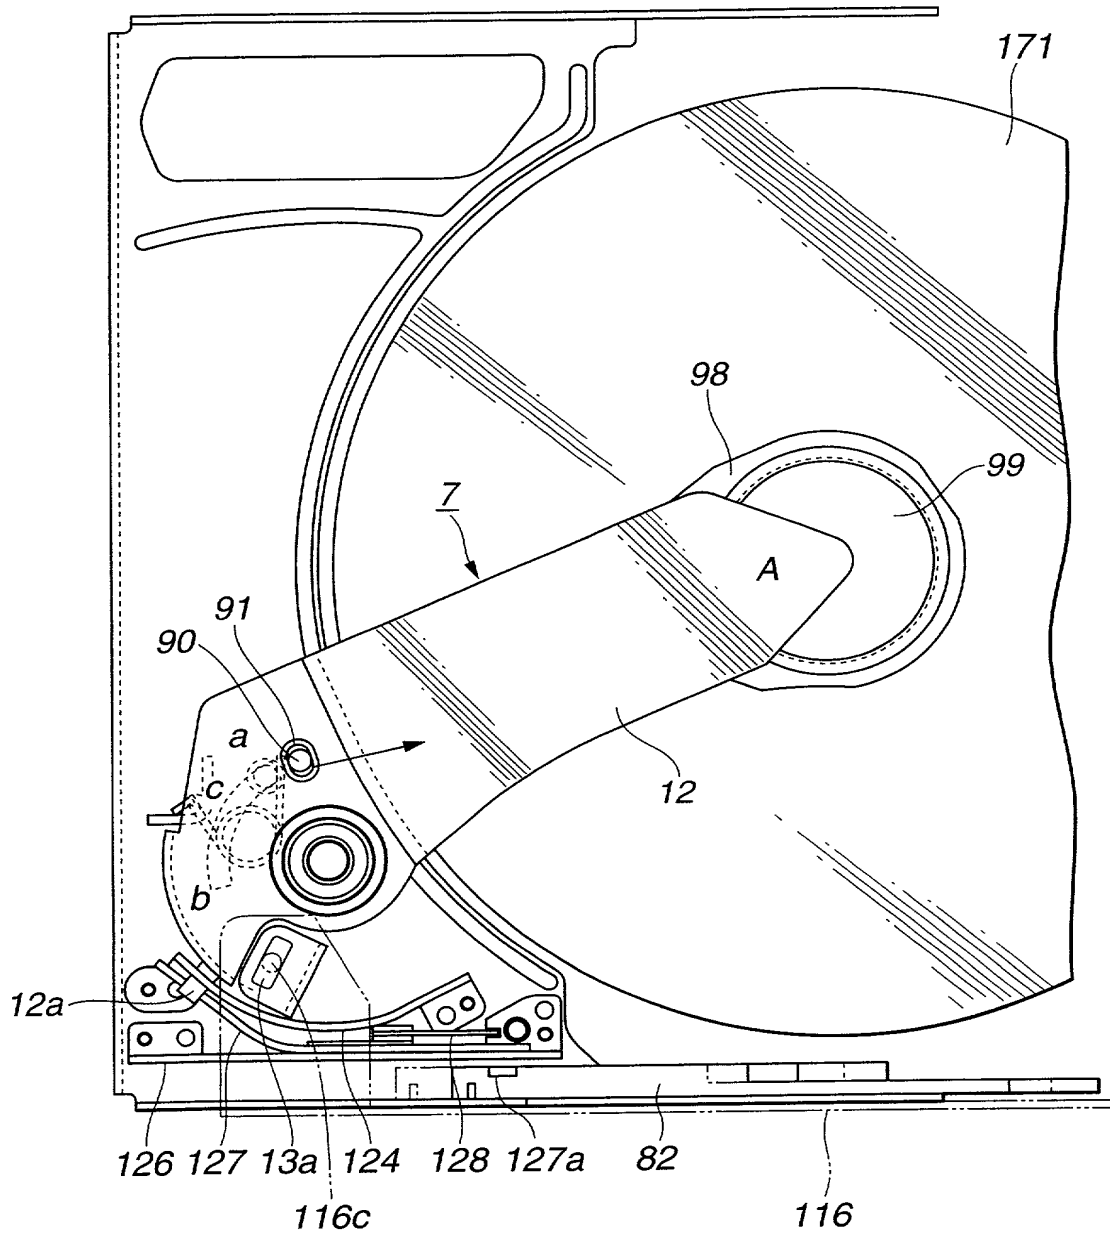
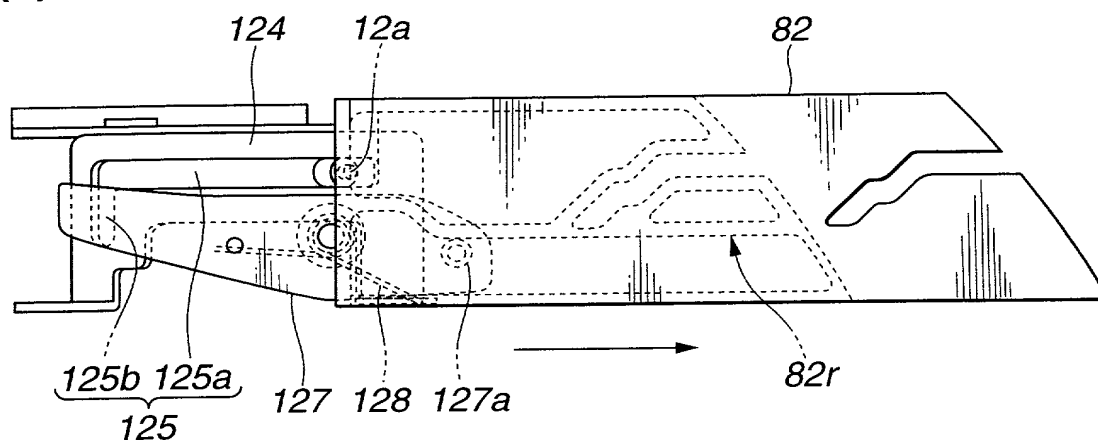
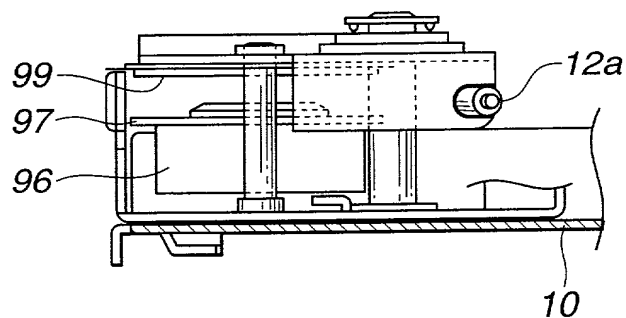


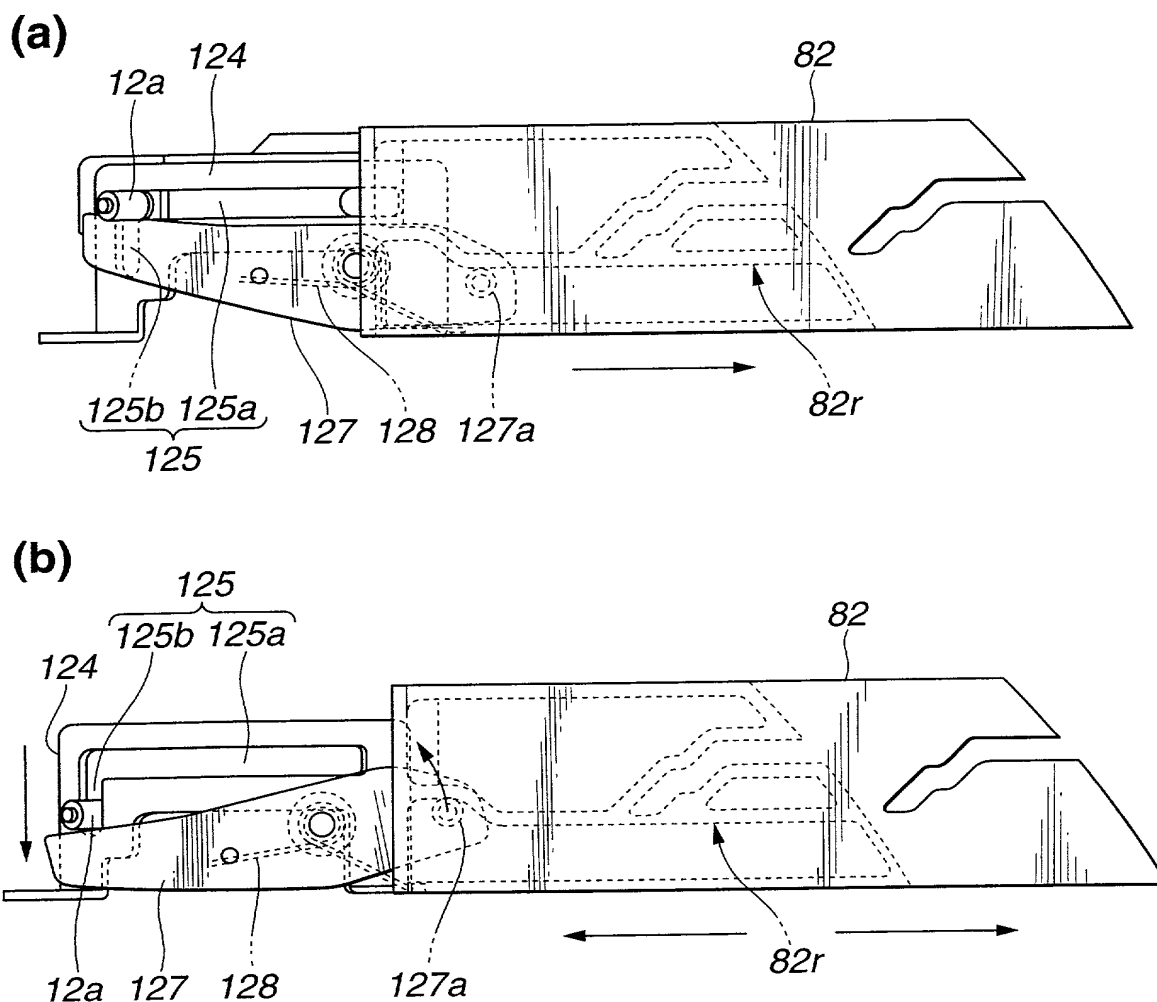
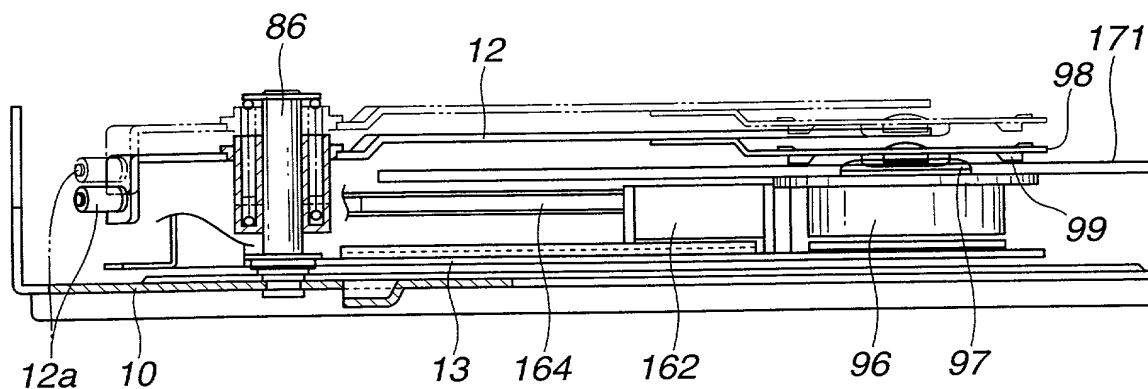


Fig.31





**Fig.32****(a)****(b)**

**Fig.33****Fig.34**



28727US/Act

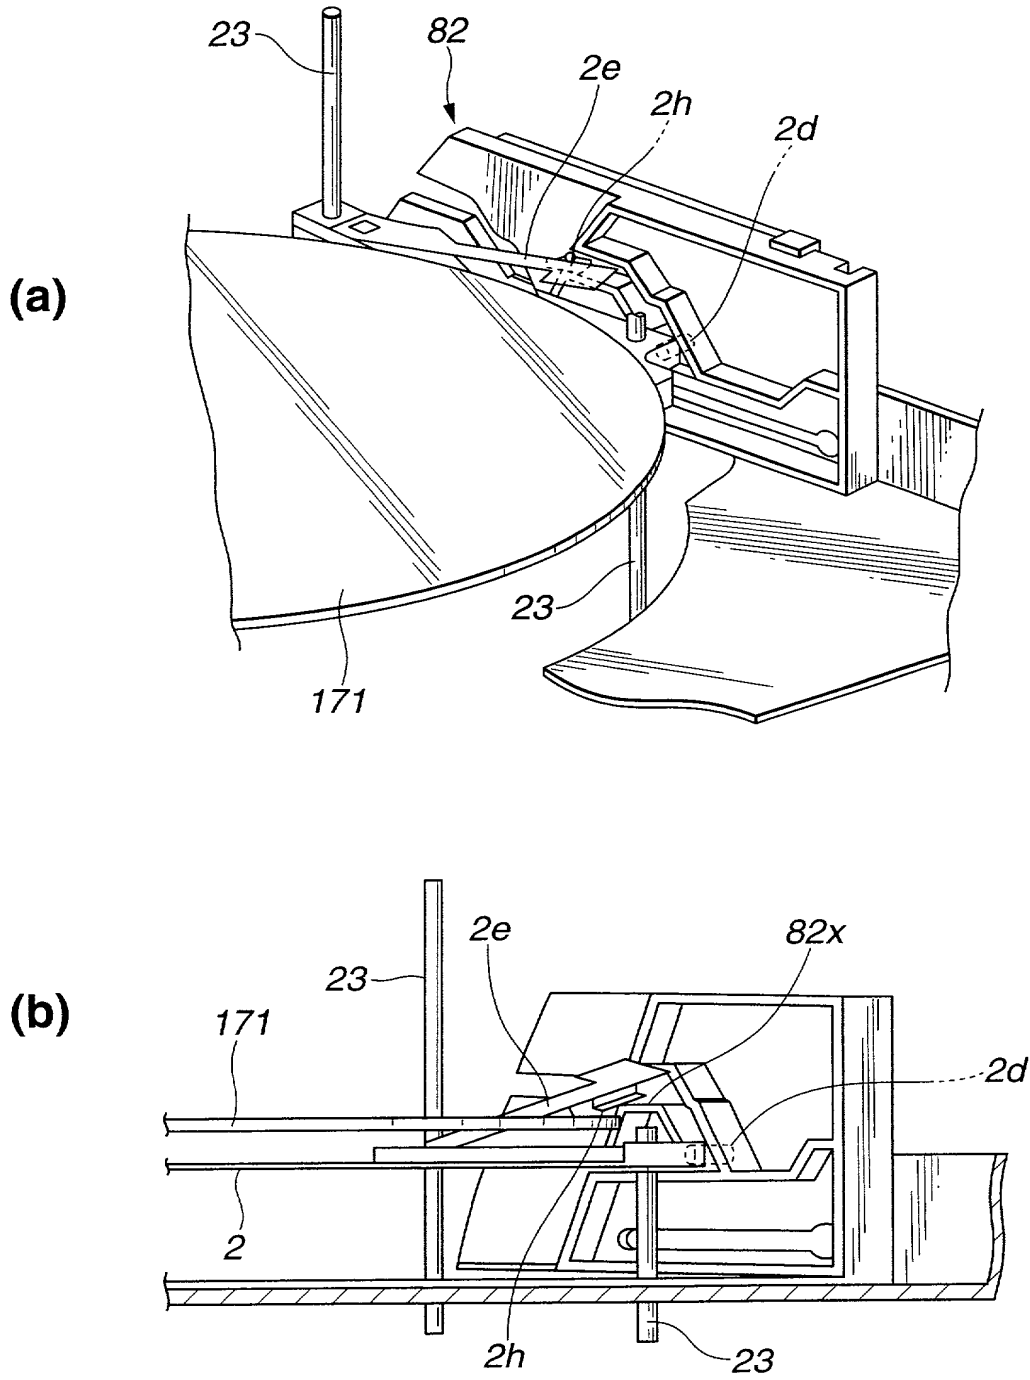
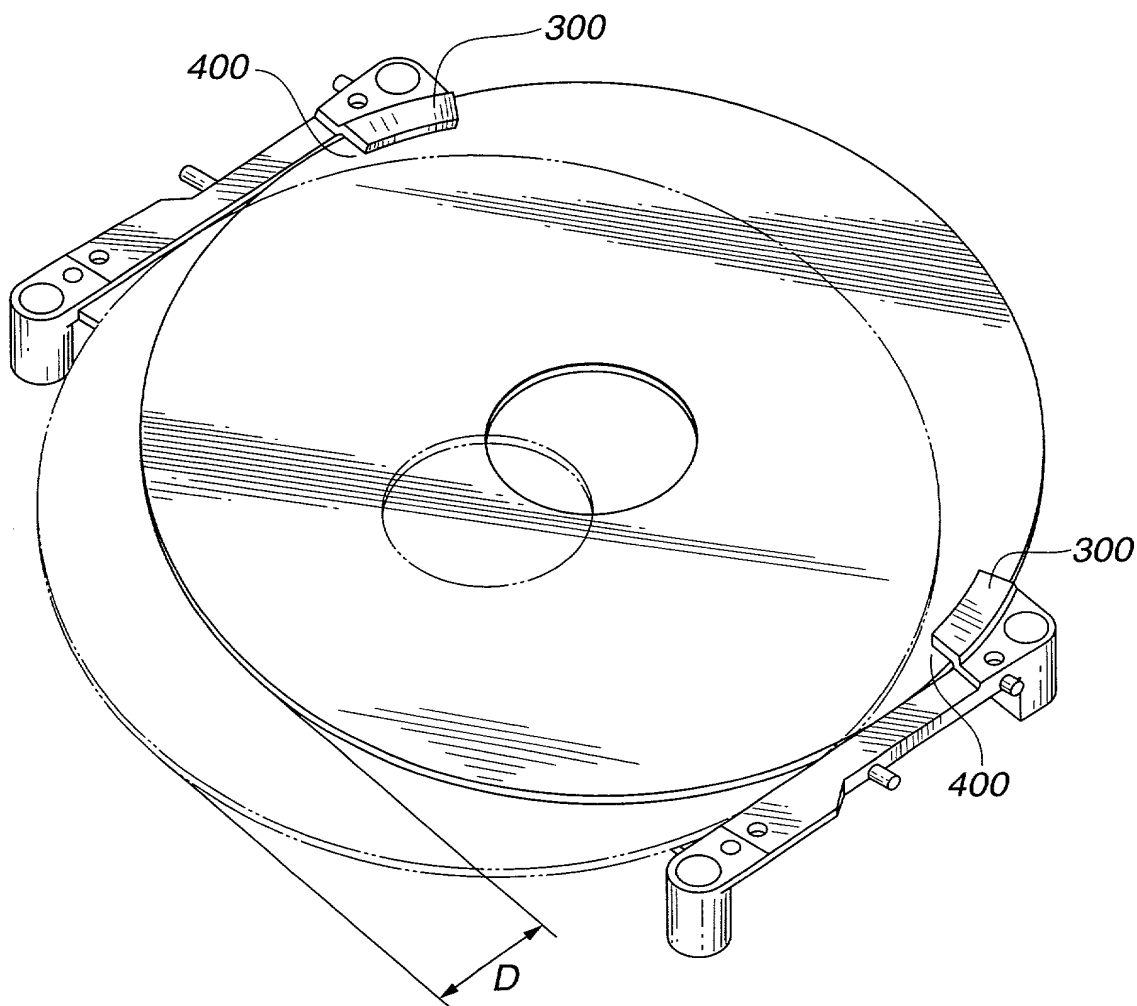
**Fig.35**



Fig.36



# Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

SDOP/588US00

Japanese Language Declaration

P03SNY007US

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者（下記の名称が複数の場合）であると信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

DISC RECORDING AND/OR REPRODUCING

APPARATUS

上記発明の明細書は、

the specification of which

☐ 本書に添付されています。

☐ is attached hereto.

☐ \_\_\_\_月\_\_\_\_日に提出され、米国出願番号または特許協定条約国際出願番号を\_\_\_\_とし、  
(該当する場合) \_\_\_\_に訂正されました。

☒ was filed on September 28, 2000

as United States Application Number or

PCT International Application Number

PCT/JP00/06679 and was amended on

March 13, 2001 (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration  
(日本語宣言書)

- 私は、米国法典第35編119条 (a) - (d) 項又は365条 (b) 項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365 (a) 項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)  
外国での先行出願

11-276288	Japan
(Number)	(Country)
(番号)	(国名)
PCT/JP00/06679	Japan
(Number)	(Country)
(番号)	(国名)

私は、第35編米国法典119条 (e) 項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条 (c) に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)	(Filing Date)
(出願番号)	(出願日)

(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、私自信の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

	Priority Claimed	
	優先権主張	
29 September 1999	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Day/Month/Year Filed)	Yes	No
(出願年月日)	はい	いいえ
28 September 2000	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Day/Month/Year Filed)	Yes	No
(出願年月日)	はい	いいえ

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)	(Filing Date)
(出願番号)	(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況：特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況：特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration  
(日本語宣言書)

委任状：私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。  
(弁護士、または代理人の指名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)



022850

書類送付先

Send Correspondence to:



022850

直接電話連絡先：(名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)  
(703) 413-3000

単独発明者または第一の共同発明者の氏名	10	Full name of sole or first joint inventor Tomohiro WATANABE
発明者の署名	日付	Inventor's signature Tomohiro Watanabe
住所		Residence Kanagawa, Japan
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo 141-0001 Japan
第二の共同発明者の氏名	20	Full name of second joint inventor, if any Kazuyuki TAKIZAWA
第二の共同発明者の署名	日付	Second joint Inventor's signature Kazuyuki Takizawa
住所		Residence Chiba, Japan
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo 141-0001 Japan

(第三以降の共同発明者についても同様に記載し、署名すること)

(Supply similar information and signature for third and subsequent joint inventors.)

# Japanese Language Declaration

(日本語宣言書)

第三の共同発明者の氏名	30	Full name of third joint inventor, if any Takayuki ISHIBASHI
第三の共同発明者の署名	日付	Third joint Inventor's signature Takayuki Ishibashi Date 26/APRIL/2001
住所		Residence Chiba, Japan JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo 141-0001 Japan

第四の共同発明者の氏名		Full name of fourth joint inventor, if any Yoshiteru TAKA
第四の共同発明者の署名	日付	Fourth joint Inventor's signature Yoshiteru Taka Date 26/APRIL/2001
住所		Residence Chiba, Japan JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo 141-0001 Japan

第五の共同発明者の氏名		Full name of fifth joint inventor, if any Toru HAMA
第五の共同発明者の署名	日付	Fifth joint Inventor's signature Toru Hama Date 26/APRIL/2001
住所		Residence Kanagawa, Japan JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo 141-0001 Japan

第六の共同発明者の氏名		Full name of sixth joint inventor, if any
第六の共同発明者の署名	日付	Sixth joint Inventor's signature Date
住所		Residence
国籍		Citizenship
郵便の宛先		Post Office Address

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)